

2024
Diaper Shirt

Fabric for shirt: woven cotton (shirt weight)

Iron-on interfacing

Ribbing: cotton knit

Cutting: Using the pattern, cut 2 fronts and one back from the woven cotton.

Cut ribbing 2 ½ X 10 inches.

Cut 2 interfacing strips ¾ X 10 inches.

Using regular sewing machine (making French seams* for side and shoulder seams).

1. Sew shoulder seams.
2. Fold sleeve edges under ¼ inch.
3. Fold over ¼ inch again and stitch close to edge.
4. Fold over edge of facing ¼ inch and sew attaching the interfacing to facing.
5. Fold ribbing and cut end diagonally from the cut edges to the folded edge. (Fig.1)
6. Place the pointed ends at the fold lines for the facing and stretch to fit the neckline. Pin or baste in place if desired.
7. Fold the facing, right sides together over the ribbing.
8. Sew in place. (Fig. 2)
9. Iron the interfacing to the facing. Fold facing over to have right sides out.
10. Optional: top stitch the facing in place.
11. Sew the side seam making a French seam.
12. Fold the bottom edge up ¼ inch.
13. Fold the bottom up ¼ inch again and sew close to the edge.
14. Attach 2 snaps (size 14), one at the neck and one 4 inches below. (Fig . 3)

*French seam- sew parts together with wrong sides together, 3/16 inch. Turn to right sides together and sew seam ¼ inch, enclosing previous seam allowance.

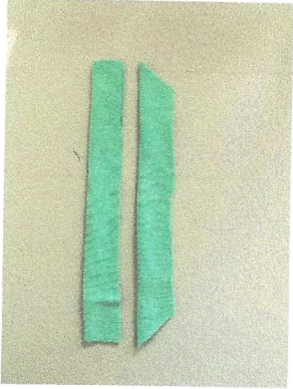



Fig. 1



Fig. 2



Fig. 3

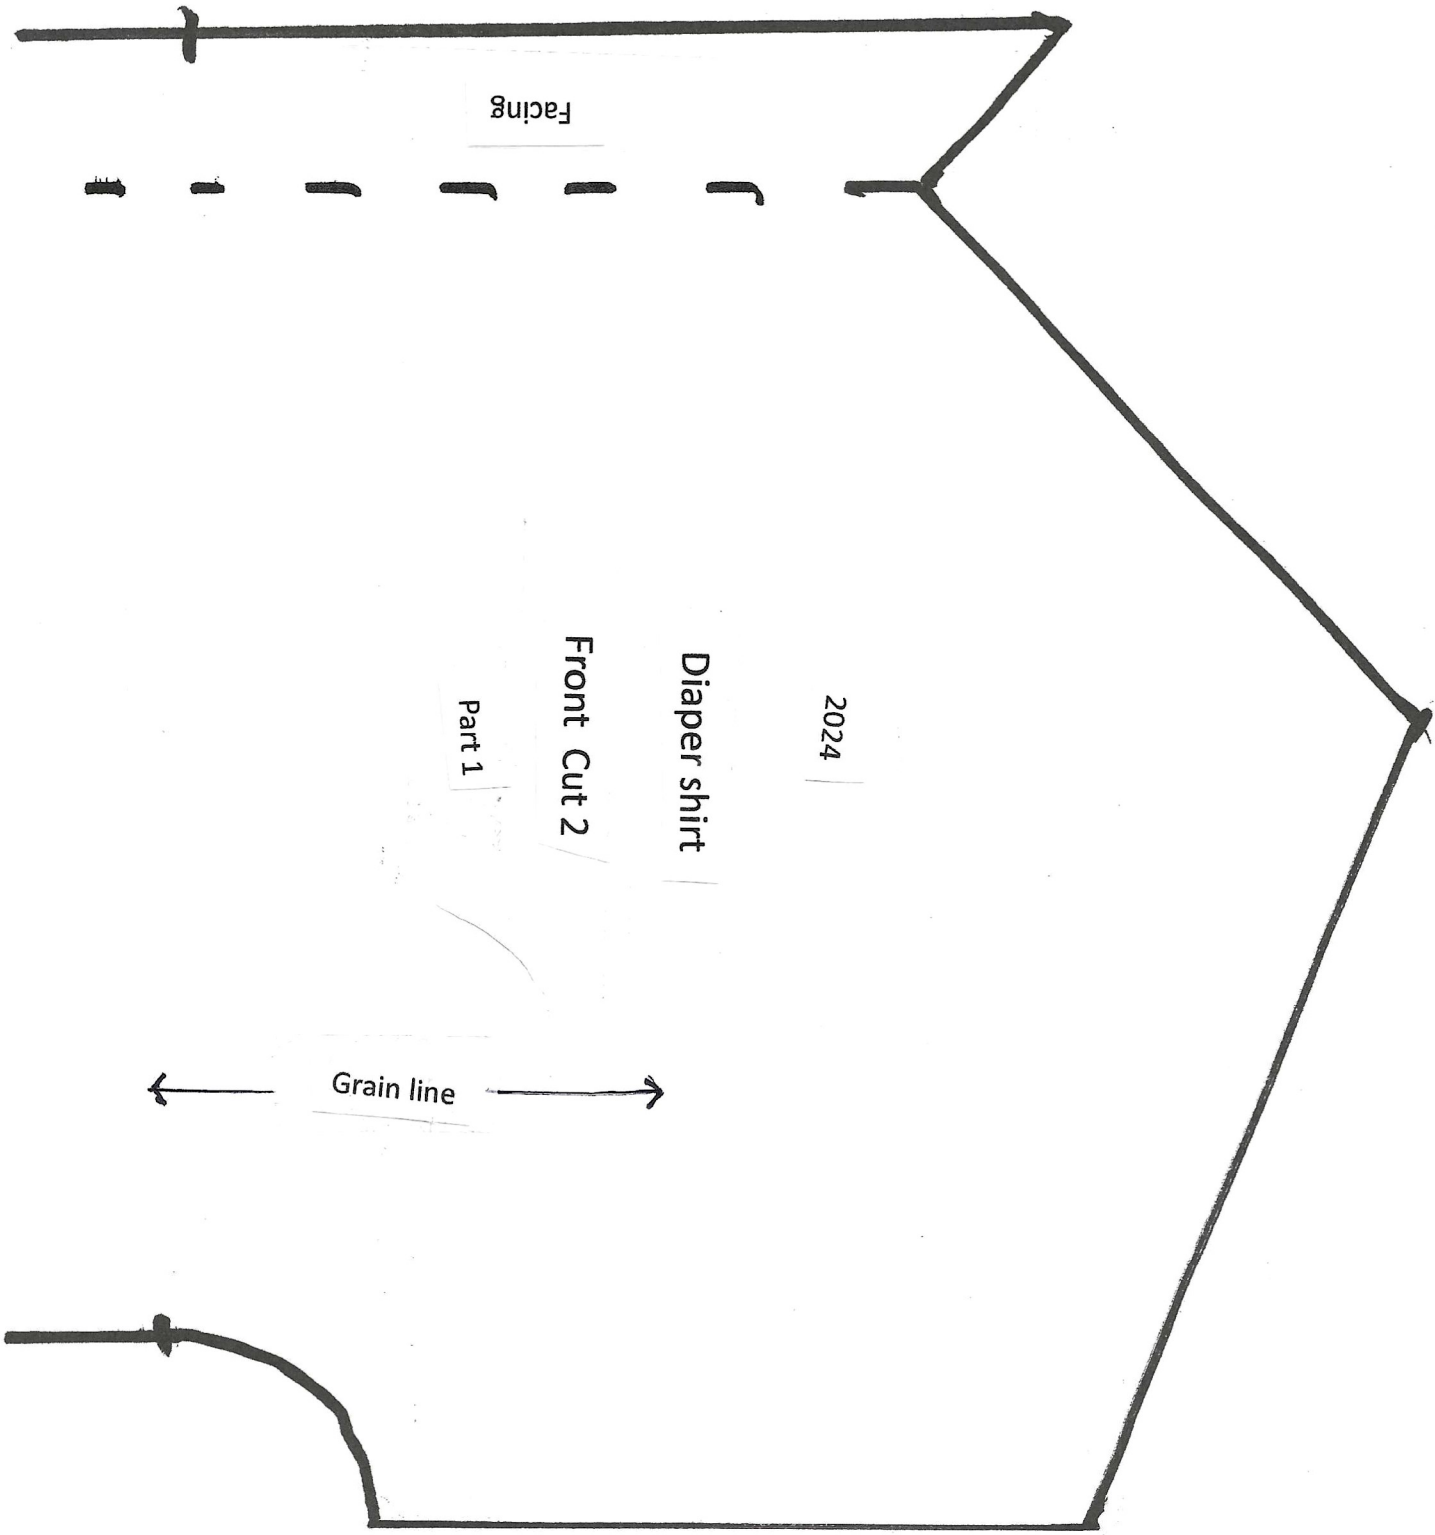


Diaper shirt

Front

Part 2

← 2 inches →

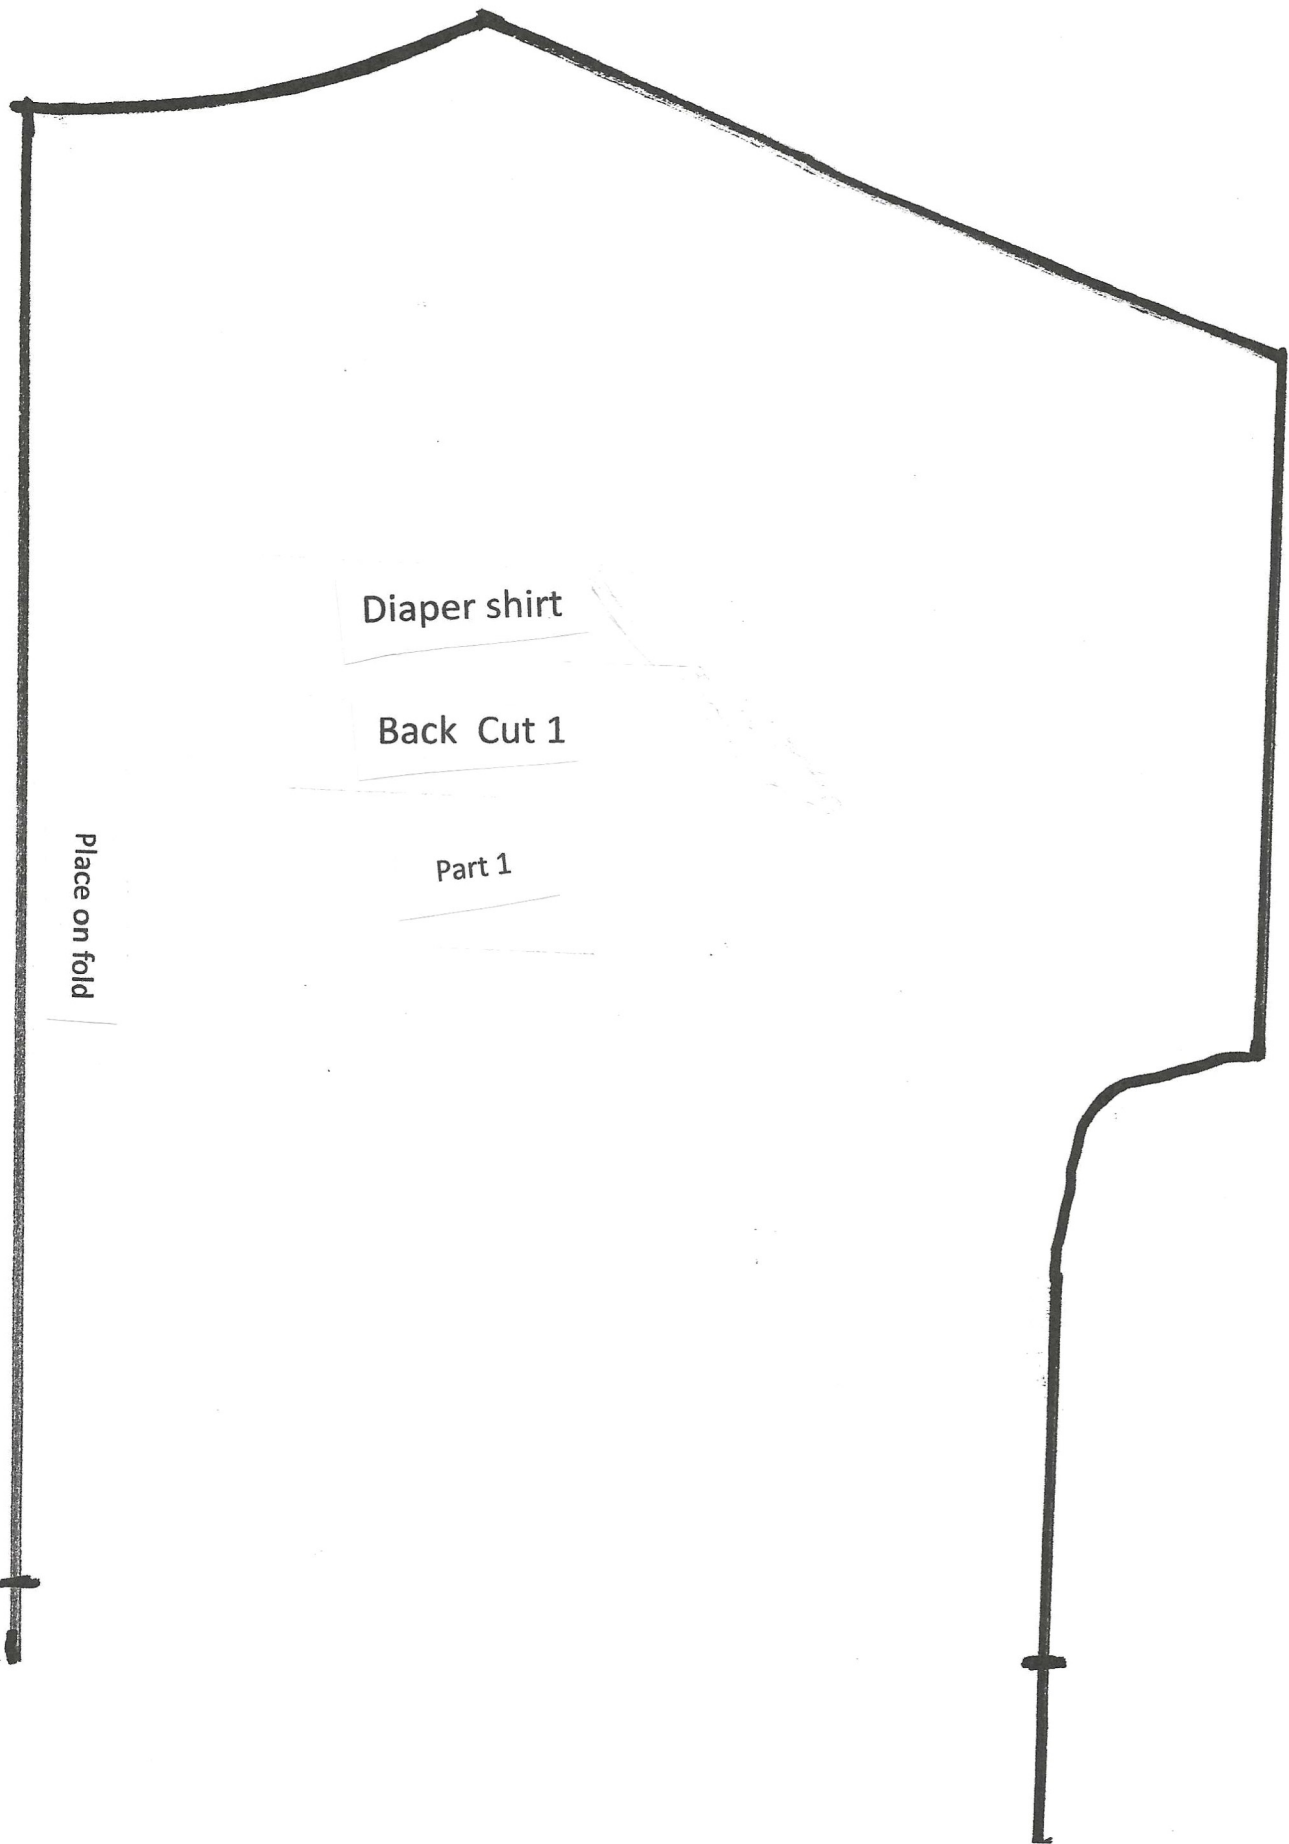

Diaper shirt

Back Cut 1

Part 1

Place on fold

Diaper shirt

Back

Part 2