


Architectural  
Division

# FAMILY OF PRODUCTS

## Architectural Lock Series

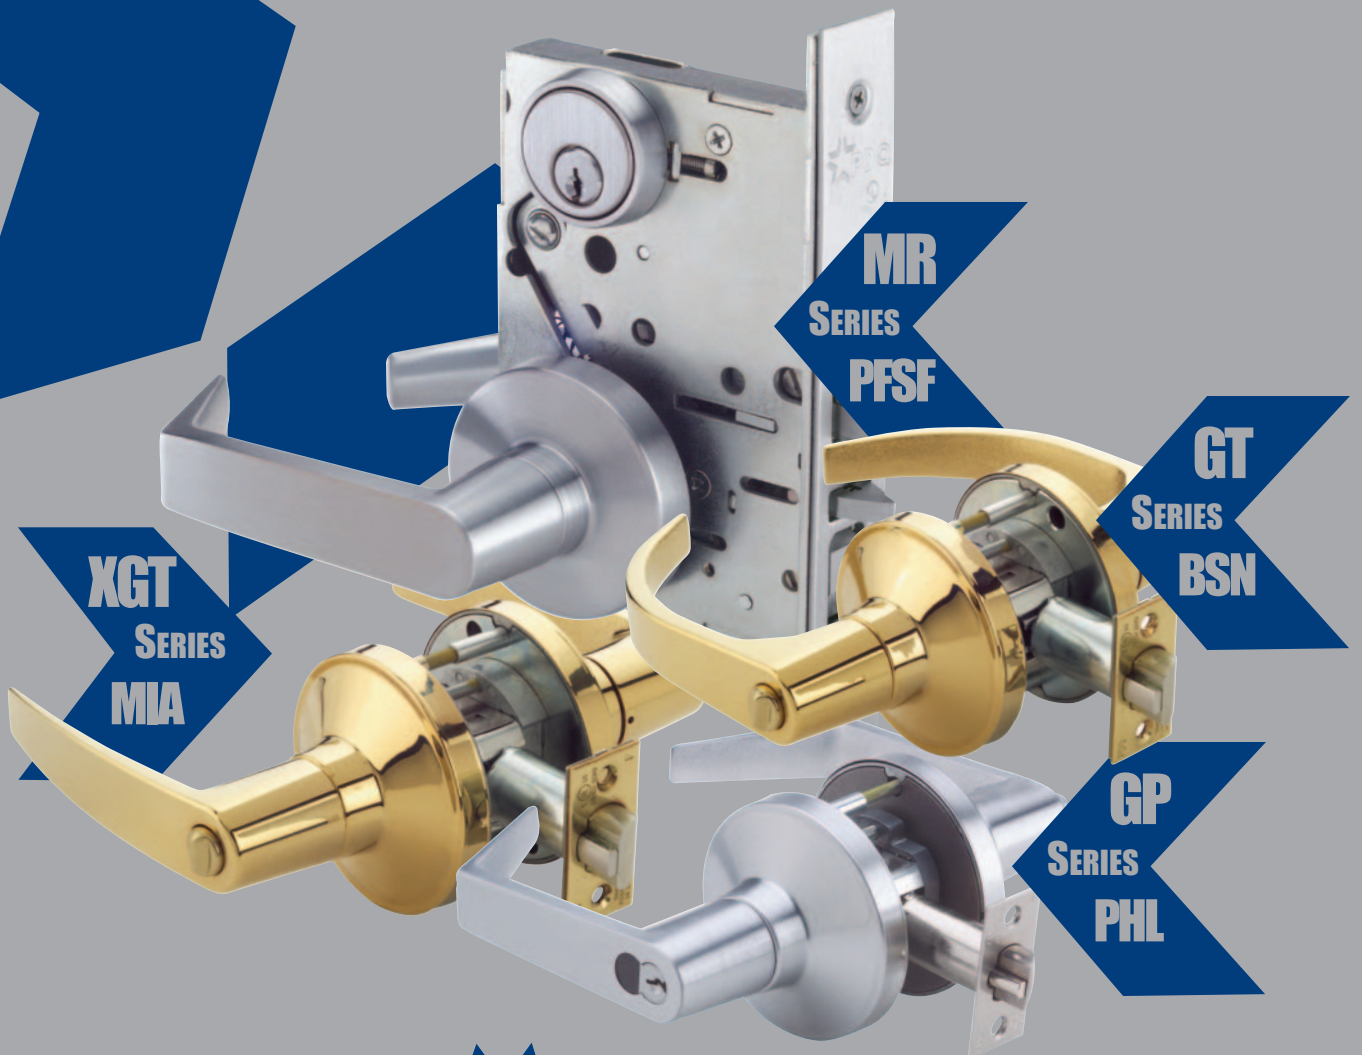

# Made in America

---

**PDQ** Manufacturing began business in 1983 when delivery time for commercial locks was measured in months. PDQ literally made a name for itself by shipping product in three working days! Today, PDQ Manufacturing still sets the standard for rapid order turnaround.

With its manufacturing facility and headquarters located in the heart of Lancaster County, Pennsylvania, PDQ also leads the industry for customer value. In this Architectural Guide, you'll find a comprehensive line of locks and hardware for almost every application...from our offering of heavy-duty, high-quality commercial locks. Add to that the 25 mortise locks in the MR Series that The National Locksmith describes as "truly revolutionary", and you'll understand why more and more firms spec PDQ locks on almost every job.

---

## INDEX

**PDQ  
Made in America .....2**

**MR Series Mortise  
Grade 1 .....3**

**XGT Series Spirit  
Grade 1 .....4**

**GT Series Spirit  
Grade 1 .....5**

**GP Series Spirit  
Grade 2 .....6**

**Architectural Lock  
Series Chart .....7**

## Superior Warranty

---

<b>Series</b>	<b>Product</b>	<b>Warranty</b>
<b>MR</b>	Mortise Grade 1 Assembled in U.S.A.	10 years
<b>XGT</b>	Extremely Heavy Duty Cylindrical Grade 1 Assembled in U.S.A.	10 years
<b>GT</b>	Extra Heavy Duty Cylindrical Grade 1 Assembled in U.S.A.	8 years
<b>GP</b>	Heavy Duty Cylindrical Grade 2 Assembled in U.S.A.	5 years

PDQ offers a family of architectural locks that are domestically manufactured; BHMA certified and go beyond the limits of ANSI standards. With PDQ you can be assured that all our domestic locks offer the following advantages:

Superior Specifications  
Superior Strength  
Superior Security  
and now a **SUPERIOR WARRANTY**

---

## SUGGESTED ARCHITECTURAL SPECIFICATIONS

Lockset will be MR Series manufactured by PDQ Industries, Inc., Leola, Pennsylvania, assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act and features a ten-year manufacturer's limited warranty. All lock bodies shall conform to Federal Specification FF-H-106 Type 86 and certified to all dimensional specifications of ANSI/BHMA A156.13-2002, Series 1000, Grade 1. Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02, Outswing: 350 ft.-lbs., Inswing: N/R, Design Load Rating: 2453 lbf. (Functions with deadbolts only). All handing shall be reversible in the field. Latchbolt can be fully retracted with 35° lever rotation. Lever shall return to within fi" (except Miami) of door. Levers will have a Philadelphia, Boston, Miami, or Dallas design. Locksets shall be listed by U.L./ U.L.C. for ratings of "A" (3 hours) label and less, for single doors up to 4'0" x 8'0". All locksets shall have a ten-year limited warranty from date of installation. All locksets shall meet or exceed all applicable requirements of the Americans with Disabilities Act of 1990.

**MR Series**

**Mortise Heavy Duty Grade 1**

## SPECIFICATIONS - MR Series

<b>DOOR THICKNESS:</b>	1-3/4" to 2" standard. Other door thickness, consult factory.
<b>CASE:</b>	5-7/8" x 4-1/8" x 7/8". 13-gauge heavy duty wrought steel. Zinc and clear chromate for corrosion resistance. One case size for all functions.
<b>BACKSET:</b>	2-3/4" only.
<b>ARMORED FRONT:</b>	8" x 1-1/4". Brass or stainless steel. ANSI Standard A115.1. Adjustable from flat to beveled 1/8" in 2" bevel.
<b>DEADBOLT:</b>	9/16" x 1-1/4". 1" throw. Stainless steel.
<b>GUARDBOLT:</b>	Stainless steel. Non-handed.
<b>LATCHBOLT:</b>	1-5/8" x 1" throw anti-friction. Stainless steel. Field reversible. Solid latchbolt optional.
<b>STOP WORKS:</b>	Stainless steel. Rocker type.
<b>HAND CASE:</b>	Handed. Reversible in field.
<b>HAND TRIM:</b>	Handed. Reversible in field. (PHL/BSN/MIA/DAL)
<b>HUBS:</b>	Sintered copper infiltrated iron.
<b>SPRINGS:</b>	High-carbon steel.
<b>STRIKE:</b>	4-7/8" x 1-1/4" x 3/32" (ASA). Brass or stainless steel. Curved, straight, or extended lip.
<b>CYLINDER:</b>	Brass 6-pin cylinder keyed to 5 pins; 1-1/4" standard escutcheon, 1-1/8" standard sectional.
<b>KEYWAYS:</b>	Available in keyways of most major manufacturers. Interchangeable core.
<b>KEYS:</b>	Two (2) change keys per lock.
<b>KEYING:</b>	Can be MK, CMK, GMK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Construction cylinders available. Can be keyed into existing masterkey systems of other manufacturers.
<b>FINISHES:</b>	US3 (605), US4 (606), US10 (612), US10B (613), US26 (625), US26D (626) / DAL US32D(630)
<b>CERTIFICATIONS:</b>	<ul style="list-style-type: none"> <li>BHMA Certified Product</li> <li>ANSI/BHMA A156.13-2002, Series 1000, Grade 1.</li> <li>Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02, Outswing: 350 ft.-lbs., Inswing: N/R, Design Load Rating: 2453 lbf. (Functions with deadbolts only).</li> </ul>
<b>WARRANTY:</b>	Ten-year limited warranty.
<b>COUNTRY OF ORIGIN:</b>	Assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act.




**MR Series PHILADELPHIA (PFSF) TRIM**

## Lever Styles


All trim is through-bolted and self-aligning




**PFSF**




**BFSF**




**MFSF**



**DWSW**



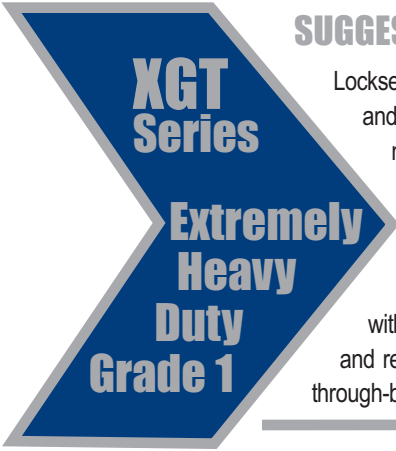


## SUGGESTED ARCHITECTURAL SPECIFICATIONS

Lockset will be XGT Series *SPIRIT* from PDQ Industries, Inc., Leola, Pennsylvania, assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act and features a ten-year manufacturer's limited warranty, and be certified to ANSI/BHMA A156.2-1996, Series 4000, Grade 1. Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02. Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 1485 lbf. Locksets shall be listed by U.L./U.L.C. for ratings of "A" (3 hours) label and less, for single doors up to 4'0" x 8'0". U.L.10C/UBC 7-2 (1997) Positive Pressure Rated and U.L.10B Neutral Pressure Rated. Levers to be solid cast, with no plastic inserts, minimum 5-1/2" overall length with supportive spring power totally independent of chassis or latch unit. Latchbolt to be minimum 9/16" throw and requires only 41° rotation of levers for full retraction. Lockset fasteners to be concealed with through-the-door through-bolt attachment outside the 2-1/8" door prep, **exceeds 3000 in lbs. of torque resistance.**

## SPECIFICATIONS - XGT Series

<b>FOR DOORS:</b>	1-3/4" to 2 1/4" thick. Factory adjusted for 1-3/4".
<b>DOOR PREP:</b>	Fits standard 161 door prep. Through-door thru-bolting.
<b>BACKSET:</b>	2-3/4" only. Guarded.
<b>CASE:</b>	Heavy duty zinc diecast hubs, chromated cold rolled steel, stainless steel and Zamak 5 mechanism. Billet steel spindles. <b>High strength stainless steel investment cast locking tip.</b>
<b>FRONT:</b>	Stainless steel or wrought brass. 2-1/4" x 1-1/8". Beveled 1/8" on 2".
<b>ROSE:</b>	3-3/8" diameter.
<b>STRIKE:</b>	4-7/8" x 1-1/4" (ASA). "T" or "FL" Strike optional. Stainless steel or wrought brass.
<b>LATCHBOLT:</b>	9/16" Throw. Adjustable front for flat or beveled doors.
<b>HAND:</b>	Non-handed.
<b>TRIM:</b>	PHL, BSN or MIA levers are solid zinc diecast. 41° lever rotation. Wrought brass roses. Concealed screws. <b>High strength stainless steel investment cast spindle.</b> <b>Heavy gauge steel mounting plates.</b>
<b>KEYS:</b>	Two (2) change keys per lock.
<b>KEYWAYS:</b>	Available in keyways of most major manufacturers.
<b>INTERCHANGEABLE CORE:</b>	Available for all keyed functions. 6 or 7 pin.
<b>CYLINDER:</b>	Brass 6-pin cylinder keyed to 5 pins.
<b>KEYING:</b>	Can be MK, CMK, GMK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
<b>FINISHES:</b>	US3 (605), US4 (606), US10 (612), US10B (613), US17A (621), US26 (625), US26D (626)
<b>CERTIFICATIONS:</b>	<ul style="list-style-type: none"> <li>• BHMA Certified Product</li> <li>ANSI/BHMA A156.2-1996, Series 4000, Grade 1.</li> <li>Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02,</li> <li>Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 1485 lbf.</li> </ul>
	 <ul style="list-style-type: none"> <li>• Meets all accessibility requirements of the ADA.</li> <li>• U.L./U.L.C. Listed for "A" label (3 hour) single swing doors (4'0" x 8'0").</li> <li>• U.L.10C/UBC 7-2 (1997) Positive Pressure Rated.</li> <li>• U.L.10B Neutral Pressure Rated.</li> <li>• Exceeds 3000 in. lbs. of torque resistance.</li> <li>• Certification through ETL.</li> </ul>
<b>WARRANTY:</b>	Ten-year limited warranty
<b>COUNTRY OF ORIGIN:</b>	Assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act.

BEYOND  
THE  
LIMITS



**XGT SERIES SPIRIT  
PHILADELPHIA (PHL) LEVER**

## SUGGESTED ARCHITECTURAL SPECIFICATIONS

Lockset will be GT Series *SPIRIT* from PDQ Industries, Inc., Leola, Pennsylvania, assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act and features an eight-year manufacturer's limited warranty, and be certified to ANSI/BHMA A156.2-1996, Series 4000, Grade 1. Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02. Outswing: 350 ft.-lbs., Inswing: N/R, Design Load Rating: 1485 lbf. Locksets shall be listed by U.L./U.L.C. for ratings of "A" (3 hours) label and less, for single doors up to 4'0" x 8'0". U.L.10C/UBC 7-2 (1997) Positive Pressure Rated and U.L.10B Neutral Pressure Rated. Levers to be solid cast, with no plastic inserts, minimum 5-1/2" overall length with supportive spring power totally independent of chassis or latch unit. Latchbolt to be minimum 9/16" throw and requires only 41° rotation of levers for full retraction. Lockset fasteners to be concealed with through-the-door through-bolt attachment outside the 2-1/8" door prep, **exceeds 2100 in lbs. of torque resistance.**



# BEYOND THE LIMITS



**GT SERIES SPIRIT  
PHILADELPHIA (PHL) LEVER**

## SPECIFICATIONS - GT Series

<b>FOR DOORS:</b>	1-3/4" to 2 1/4" thick. Factory adjusted for 1-3/4".
<b>DOOR PREP:</b>	Fits standard 161 door prep. Through-door thru-bolting.
<b>BACKSET:</b>	2-3/4" only. Guarded.
<b>CASE:</b>	Heavy duty zinc diecast, investment cast and chromated cold rolled steel mechanism. Billet steel spindles.
<b>FRONT:</b>	Stainless steel or wrought brass. 2-1/4" x 1-1/8". Beveled 1/8" on 2".
<b>ROSE:</b>	3-3/8" diameter.
<b>STRIKE:</b>	4-7/8" x 1-1/4" (ASA). "T" or "FL" Strike optional. Stainless steel or wrought brass.
<b>LATCHBOLT:</b>	9/16" Throw. Adjustable front for flat or beveled doors.
<b>HAND:</b>	Non-handed
<b>TRIM:</b>	PHL, BSN or MIA levers are solid zinc diecast. 41° lever rotation. Wrought brass roses. Concealed screws.
<b>KEYS:</b>	Two (2) change keys per lock.
<b>KEYWAYS:</b>	Available in keyways of most major manufacturers.
<b>INTERCHANGEABLE</b>	
<b>CORE:</b>	Available for all keyed functions. 6 or 7 pin.
<b>CYLINDER:</b>	Brass 6-pin cylinder keyed to 5 pins.
<b>KEYING:</b>	Can be MK, CMK, GMK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
<b>FINISHES:</b>	US3 (605), US4 (606), US10 (612), US10B (613), US17A (621), US26 (625), US26D (626)
<b>CERTIFICATIONS:</b>	<ul style="list-style-type: none"><li>• BHMA Certified Product</li><li>ANSI/BHMA A156.2-1996, Series 4000, Grade 1.</li><li>Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02, Outswing: 350 ft.-lbs., Inswing: N/R, Design Load Rating: 1485 lbf.</li></ul>



- Meets all accessibility requirements of the ADA.
- U.L./U.L.C. Listed for "A" label (3 hour) single swing doors (4'0" x 8'0").
- U.L.10C/UBC 7-2 (1997) Positive Pressure Rated.
- U.L.10B Neutral Pressure Rated.
- Exceeds 2100 in. lbs. of torque resistance.
- Certification through ETL.

**WARRANTY:** Eight-year limited warranty  
**COUNTRY OF ORIGIN:** Assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act.


**GP  
Series**

**Heavy  
Duty  
Grade 2**

## SUGGESTED ARCHITECTURAL SPECIFICATIONS

GP Series *SPIRIT* from PDQ Industries, Inc., Leola, Pennsylvania, assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act and features a five-year manufacturer's limited warranty, and be certified to ANSI/BHMA A156.2-1996, Series 4000, Grade 2. Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02. Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 685 lbf. Locksets shall be listed by U.L./U.L.C. for ratings of "A" (3 hours) label and less, for single doors up to 4'0" x 8'0". U.L.10C/UBC 7-2 (1997) Positive Pressure Rated and U.L.10B Neutral Pressure Rated. Levers to be solid cast, with no plastic inserts, minimum 5-1/2" in overall length with supportive spring power totally independent of chassis or latch unit. Lockset to be fully adjustable for 1-3/8" to 1-3/4" doors. Positive lever stop is to be totally independent of chassis or latch mechanism. Lockset fasteners to be concealed with through-the-door through-bolt attachment outside the 2-1/8" door prep, **exceeds 1600 in lbs. of torque resistance.**

## SPECIFICATIONS - GP Series





<b>FOR DOORS:</b>	1-3/8" to 1-3/4" thick. Factory adjusted for 1-3/4".
<b>DOOR PREP:</b>	Fits standard 161 door prep. Through-door thru-bolting.
<b>BACKSET:</b>	2-3/4". 2-3/8" or 5" backset optional.
<b>CASE:</b>	Heavy duty zinc diecast, investment cast and stainless steel mechanism.
<b>FRONT:</b>	Stainless steel or wrought brass. 2-1/4" X 1-1/8". Beveled 1/8" on 2".
<b>ROSE:</b>	3-3/8" diameter.
<b>STRIKE:</b>	4-7/8" X 1-1/4" (ASA). "T" or "FL" Strike optional. Stainless steel or wrought brass.
<b>LATCHBOLT:</b>	1/2" throw. Adjustable front for flat or beveled doors.
<b>HAND:</b>	Non-handed.
<b>TRIM:</b>	PHL, BSN or MIA levers are solid zinc diecast. 65° lever rotation. Wrought brass roses. Concealed screws.
<b>KEYS:</b>	Two (2) change keys per lock.
<b>KEYWAYS:</b>	Available in keyways of most major manufacturers.
<b>INTERCHANGEABLE</b>	
<b>CORE:</b>	Available for all keyed functions. 6 or 7 pin.
<b>CYLINDER:</b>	Brass 6-pin cylinder keyed to 5 pins.
<b>KEYING:</b>	Can be MK, CMK, GMK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
<b>FINISHES:</b>	US3 (605), US4 (606), US10 (612), US10B (613), US17A (621), US26 (625), US26D (626)
<b>CERTIFICATIONS:</b>	<ul style="list-style-type: none"><li>• BHMA Certified Product</li><li>ANSI/BHMA A156.2-1996, Series 4000, Grade 2.</li><li>Windstorm Resistant Product Listed - ANSI A250.13-2003, ASTM E1886-02, ASTM E330-02,</li><li>Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 685 lbf.</li></ul>  <ul style="list-style-type: none"><li>• Meets all accessibility requirements of the ADA.</li><li>• U.L./U.L.C. Listed for "A" label (3 hour) single swing doors (4'0" x 8'0").</li><li>• U.L.10C/UBC 7-2 (1997) Positive Pressure Rated.</li><li>• U.L.10B Neutral Pressure Rated.</li><li>• Exceeds 1600 in. lbs. of torque resistance.</li><li>• Certification through ETL.</li></ul>
<b>WARRANTY:</b>	Five-year limited warranty.
<b>COUNTRY OF ORIGIN:</b>	Assembled in the U.S.A. with US and foreign made material. This product meets the requirements of the Buy America Act.



**GP SERIES SPIRIT  
PHILADELPHIA (PHL) LEVER**

# Architectural Lock Series

## Lock Series Chart

Series	Certification	Limited Warranty	UL	ADA	Trim	Cylinders	Finishes
 <p><b>MR</b></p>	ANSI/BHMA156.13-2003 Series 1000 Grade 1 Windstorm Resistant Product ANSI A250.13-2003 ASTM E1886-02 ASTM E330-02 Outswing: 350 ft-lbs. Inswing: N/R Design Load Rating: 2453 lbf. (functions with deadbolts only) Meets the requirements of the Buy America Act.	10 years	X	X*	Philadelphia Boston Miami Dallas	Major Keyways IC Cores	605,606,612, 613,625,626, 630**
 <p><b>XGT</b></p>	ANSI/BHMA 156.2-1996 Series 4000 Grade 1 Windstorm Resistant Product ANSI A250.13-2003 ASTM E1886-02 ASTM E330-02 Outswing: 350 ft-lbs. Inswing: N/R Design Load Rating: 1485 lbf. U.L./U.L.C. Listed for "A" label (3 hour) and less U.L.10C/UBC 7-2 (1997) Positive Pressure Rated <b>Exceeds 3000 in lbs. of torque resistance</b> Certification through ETL Meets the requirements of the Buy America Act.	10 years	X	X*	Philadelphia Boston Miami	Major Keyways IC Cores	605,606,612, 613,625,626
 <p><b>GT</b></p>	ANSI/BHMA 156.2-1996 Series 4000 Grade 1 Windstorm Resistant Product ANSI A250.13-2003 ASTM E1886-02 ASTM E330-02 Outswing: 350 ft-lbs. Inswing: N/R Design Load Rating: 1485 lbf. U.L./U.L.C. Listed for "A" label (3 hour) and less U.L.10C/UBC 7-2 (1997) Positive Pressure Rated <b>Exceeds 2100 in lbs. of torque resistance</b> Certification through ETL Meets the requirements of the Buy America Act.	8 years	X	X*	Philadelphia Boston Miami	Major Keyways IC Cores	605,606,612, 613,625,626
 <p><b>GP</b></p>	ANSI/BHMA 156.2-1996 Series 4000 Grade 2 Windstorm Resistant Product ANSI A250.13-2003 ASTM E1886-02 ASTM E330-02 Outswing: 350 ft-lbs. Inswing: N/R Design Load Rating: 685 lbf. U.L./U.L.C. Listed for "A" label (3 hour) and less U.L.10C/UBC 7-2 (1997) Positive Pressure Rated <b>Exceeds 1600 in lbs. of torque resistance</b> Certification through ETL Meets the requirements of the Buy America Act.	5 years	X	X*	Philadelphia Boston Miami	Major Keyways IC Cores	605,606,612, 613,625,626

\*Except Miami Levers  
\*\*Dallas Only



**ARCHITECTURAL DIVISION**  
**By PDQ**



**PO Box 507 2754 Creek Hill Road Leola PA 17540**  
**800 441 9692**  
**717 656 4281**  
**717 656 6892 Fax**  
**[www.pdqlocks.com](http://www.pdqlocks.com)**