

SR Series

Ultralight
Commercial Lock







SR SERIES ULTRA LIGHT GRADE 3 COMMERCIAL LOCKS

SPECIFICATIONS – SR Series (CQ Knob)

FOR DOORS:	1-3/8" to 1-3/4" thick.
BACKSET:	2-3/4" to 2-3/8". Adjustable.
FRONT:	2-1/4" x 1". Stainless steel or wrought brass.
STRIKE:	Full lip standard. ASA and "T" Strike available.
LATCHBOLT:	1/2" throw.
HAND:	Non-handed.
TRIM:	Diecast CQ ball knob. Stainless steel or wrought brass knobs and roses.
KEYS:	Two change keys per lock.
KEYWAYS:	SCC
CYLINDER:	Brass 5-pin insert cylinder.
KEYING:	Options: MK, CMK, or GMK/Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing master key systems.
FINISHES:	US3 (605), US32D (630).
CERTIFICATIONS:	Complies with ANSI/BHMA A156.2, Series 4000, Grade 3.
WARRANTY:	One-year limited warranty.



SR SERIES (CQ KNOB) FUNCTION CHART

FUNCTION	FUNCTION NO.	CQ		FUNCTION DESCRIPTION
		INSIDE	OUTSIDE	
Entrance	SR 116CQ 32D			<ul style="list-style-type: none"> Latchbolt operated by both knobs Outside knob locked or unlocked by turn/push button Pushing and turning button locks outside knob requiring use of key until button is manually unlocked Pushing button only locks outside knob until unlocked with key or inside knob is turned
Passage	SR 126CQ 32D			<ul style="list-style-type: none"> Latchbolt operated by both knobs
Privacy	SR 176CQ 32D			<ul style="list-style-type: none"> Latchbolt operated by both knobs Push button on inside locks outside knob Inside knob or closing door releases button Emergency opening from outside
Single Dummy	SR 211CQ 32D			<ul style="list-style-type: none"> Single pull knob one side Surface mount






SPECIFICATIONS – SR Series (LV Lever)


FOR DOORS:	1-3/8" to 1-3/4" thick.
BACKSET:	2-3/4" to 2-3/8". Adjustable.
FRONT:	2-1/4" x 1". Stainless steel or wrought brass.
STRIKE:	Full lip standard. ASA and "T" Strike available.
LATCHBOLT:	1/2" throw.
HAND:	Non-handed.
TRIM:	Diecast LV levers. Stainless steel or wrought brass levers and roses.
KEYS:	Two change keys per lock.
KEYWAYS:	SCC
CYLINDER:	Brass 5-pin insert cylinder.
KEYING:	Options: MK, CMK, or GMK/Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing master key systems.
FINISHES:	US3 (605), US26D (626).
CERTIFICATIONS:	Complies with ANSI/BHMA A156.2, Series 4000, Grade 3. LV meets all accessibility requirements of the ADA.
WARRANTY:	One-year limited warranty.




SR SERIES (LV LEVER) FUNCTION CHART

FUNCTION	FUNCTION NO.	LV		FUNCTION DESCRIPTION
		INSIDE	OUTSIDE	
Passage	SR 126LV 26D			<ul style="list-style-type: none"> Latchbolt operated by both levers
Privacy	SR 176LV 26D			<ul style="list-style-type: none"> Latchbolt operated by outside lever Push button on inside locks lever Inside lever or closing door release button Emergency opening from outside
Single Dummy	SR 211LV 26D			<ul style="list-style-type: none"> Single pull lever one side Surface mount

SR SERIES (CQ/LV SPLIT KNOB OR LEVER) FUNCTION CHART

FUNCTION	FUNCTION NO.	CQ/LV		FUNCTION DESCRIPTION
		INSIDE	OUTSIDE	
Entrance	SR 116CQ/LV 32D/26D			<ul style="list-style-type: none"> Split function for 116: CQ knob outside with key; LV lever with no key inside

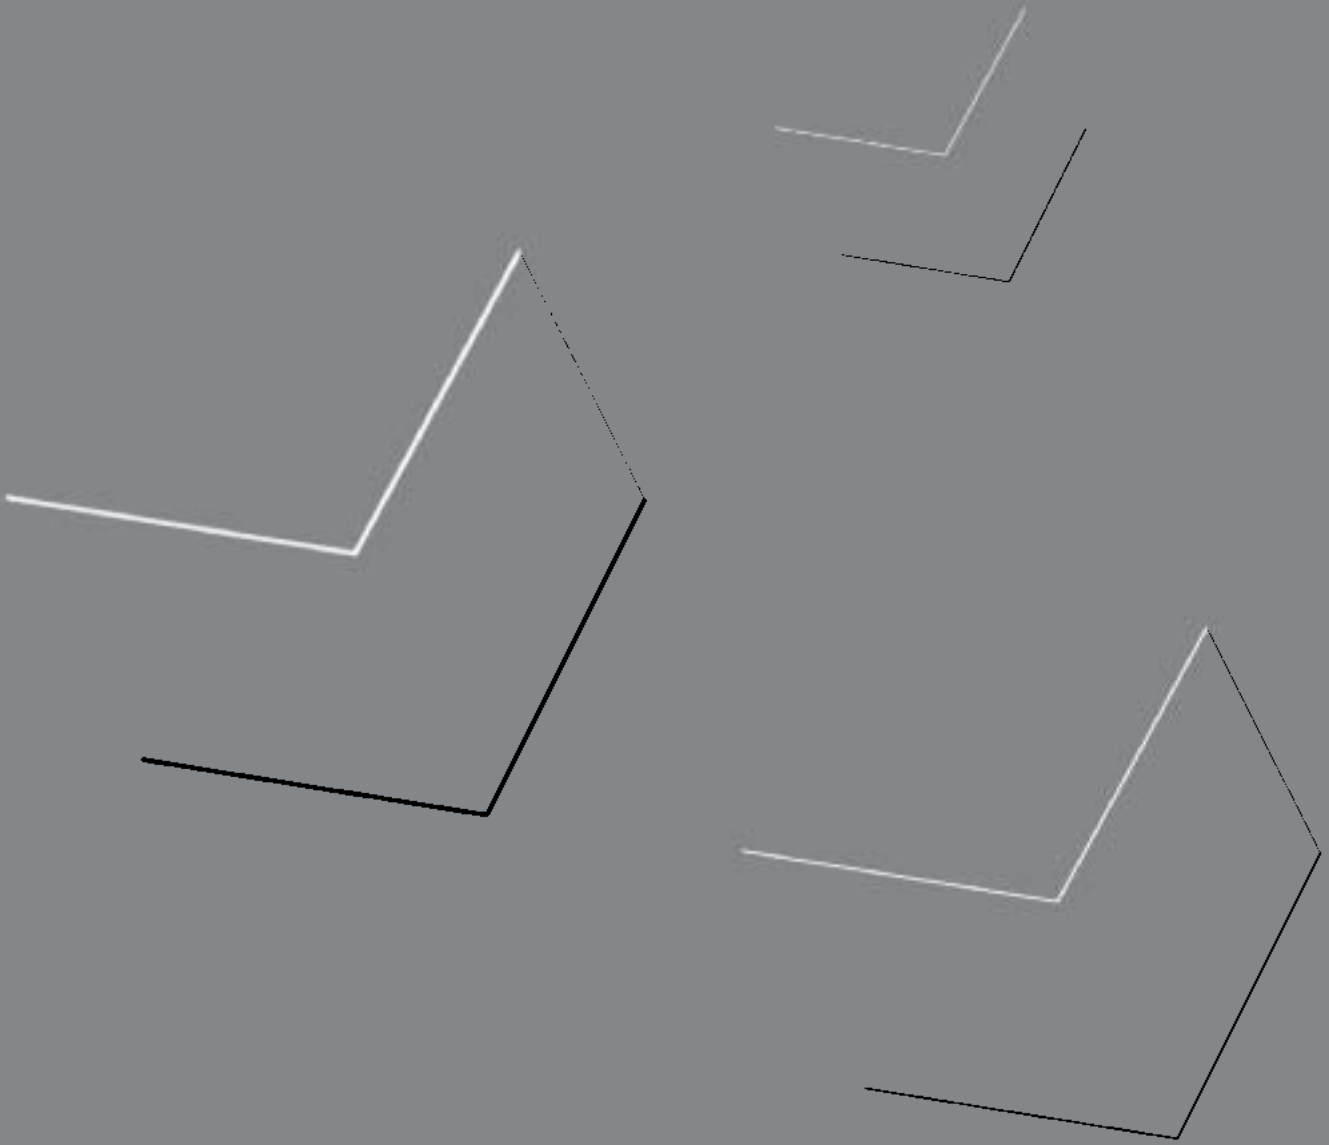

PO Box 507 2754 Creek Hill Road Leola PA 17540

800 441 9692

717 656 4281

717 656 6892 Fax

www.pdqlocks.com