

TWO PIECE CREEPER INSTRUCTIONS

MAY 2011

Cotton knit fabric

Top ribbing – neck = 1 ½ " X 14" Arm= 1 ½ " X 8"

Pant ribbing – Waist =2 ¼" X 14" Leg= 1 ½" X 8"

Note: It may be necessary to adjust the length of the ribbing depending on the stretch of the fabric. Finished waist should be approximately 13".

Assemble Top

Sew shoulder seams. Sew ribbing ends to make a circle. Fold raw edges together and mark halfway point of the circle for the center front. Mark the center front and back of the neck edge of the top. Match the center front of the ribbing with the top and the ribbing seam with the center back of the top. Stitch the ribbing to the top, stretching the ribbing to fit.

Sew the ribbing to each armhole. Sew one side seam. Finish the bottom edge as desired. Sew remaining side seam.


Assemble pants

Sew crotch seam. Sew ribbing to leg edges. Sew side seams.

Sew ribbing to waist as for the neck edge.

Creepers may be sewn with a serger or with a regular sewing machine, using a ¼" seam. Seams may be top stitched if desired.

Revised July 2014

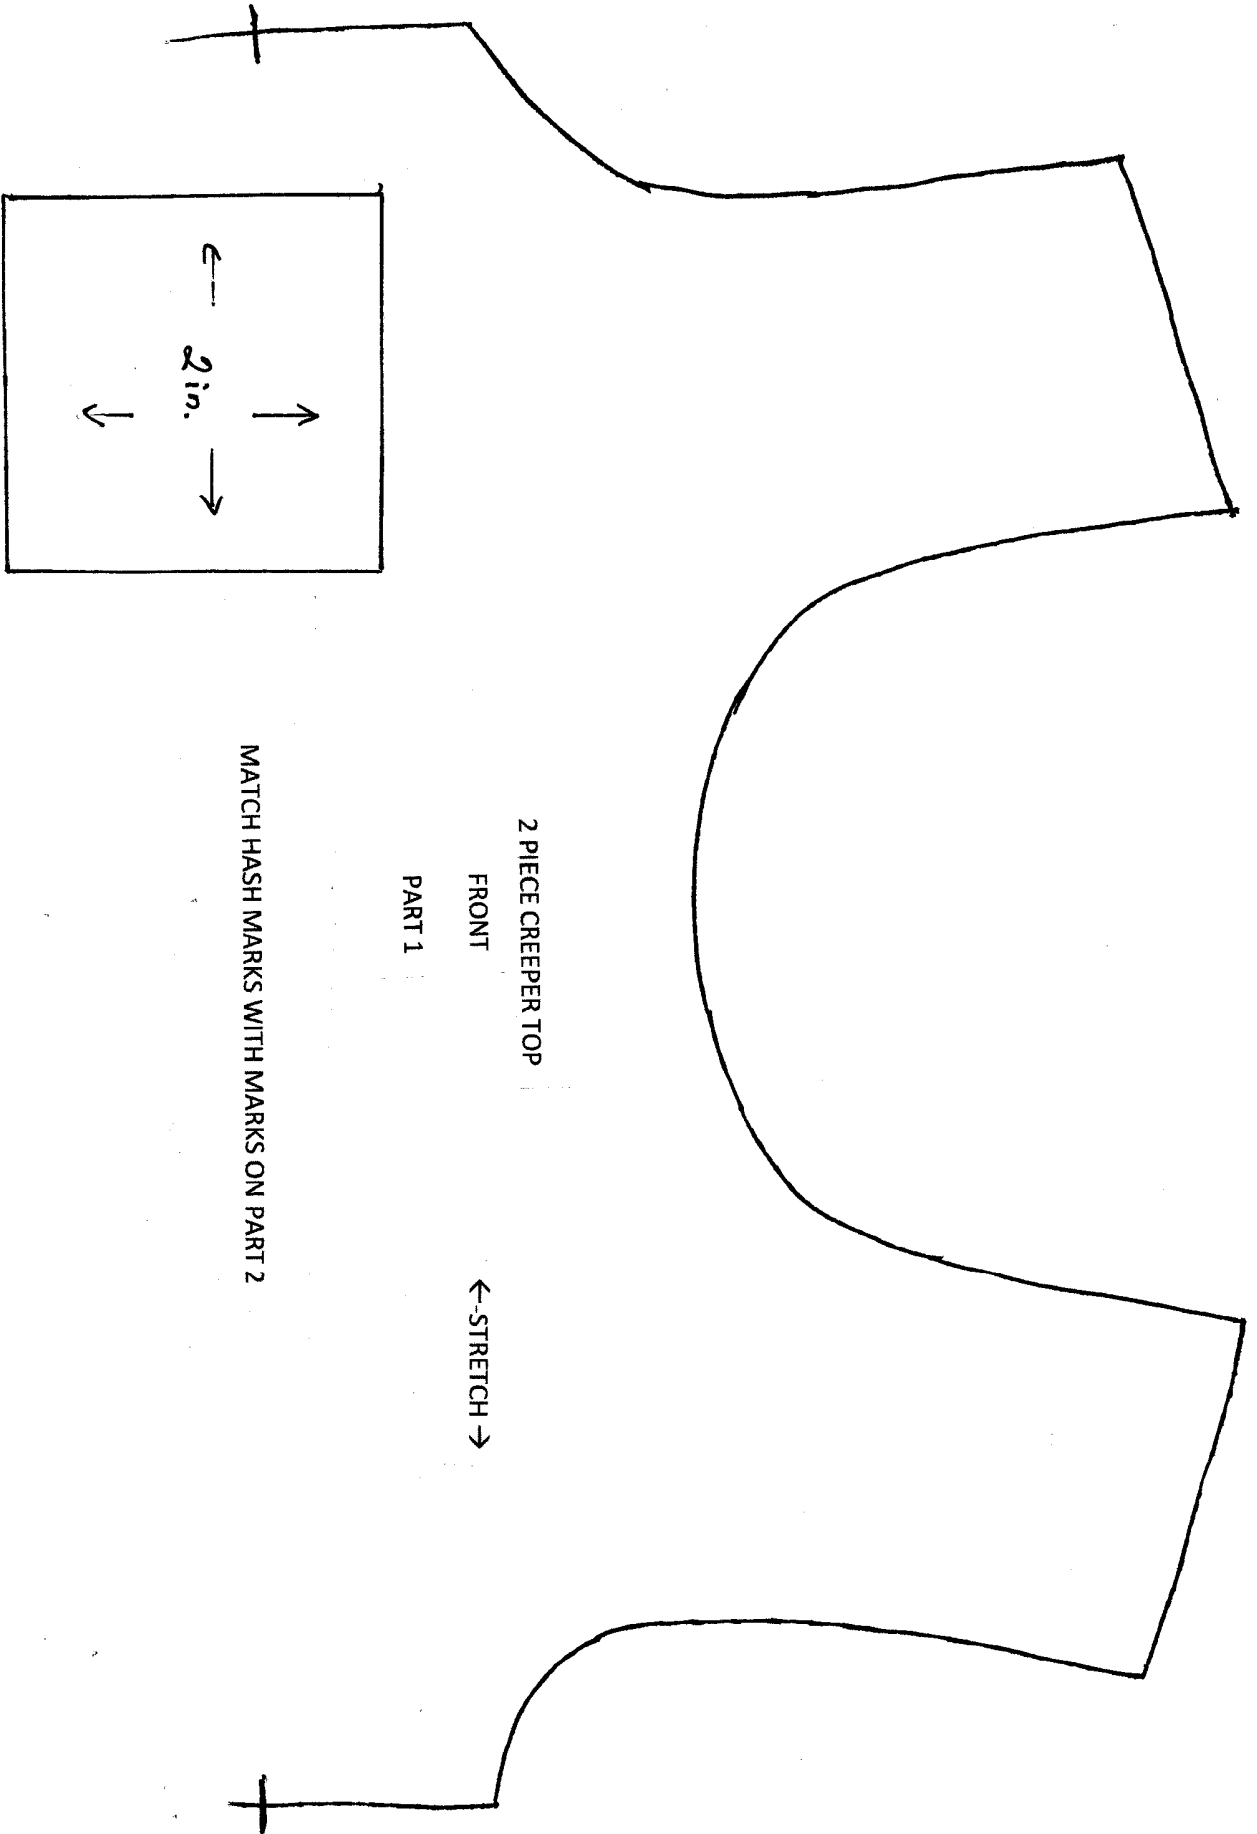

2 PIECE CREEPER TOP

FRONT

PART 1

←-STRETCH →

MATCH HASH MARKS WITH MARKS ON PART 2


MATCH HASH MARKS WITH MARKS ON PART 1

2 PIECE CREEPER TOP

FRONT

PART 2

←-STRETCH →

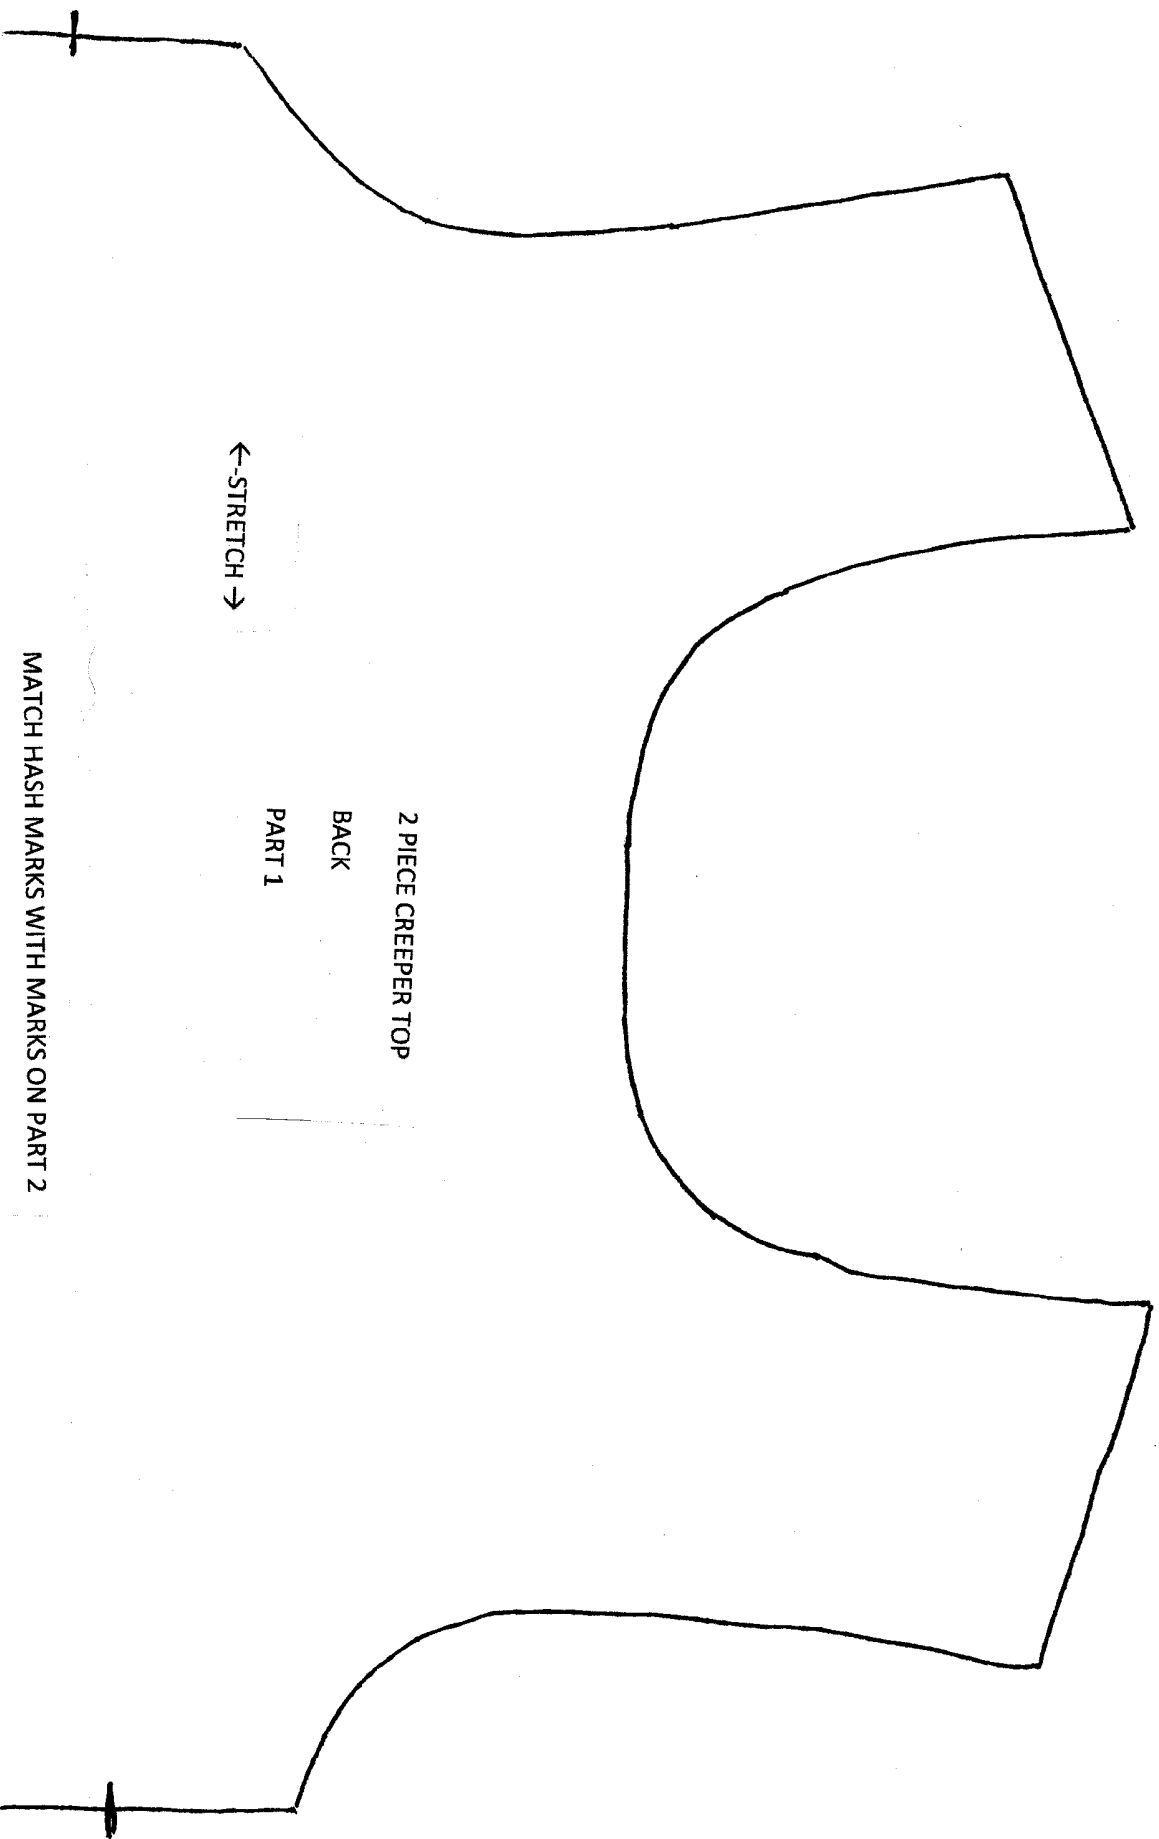

2 PIECE CREEPER TOP

BACK

PART 1

←-STRETCH →

MATCH HASH MARKS WITH MARKS ON PART 2


MATCH HASH MARKS WITH MARKS ON PART 1


2 PIECE CREEPER TOP

BACK

PART 2

←-STRETCH →

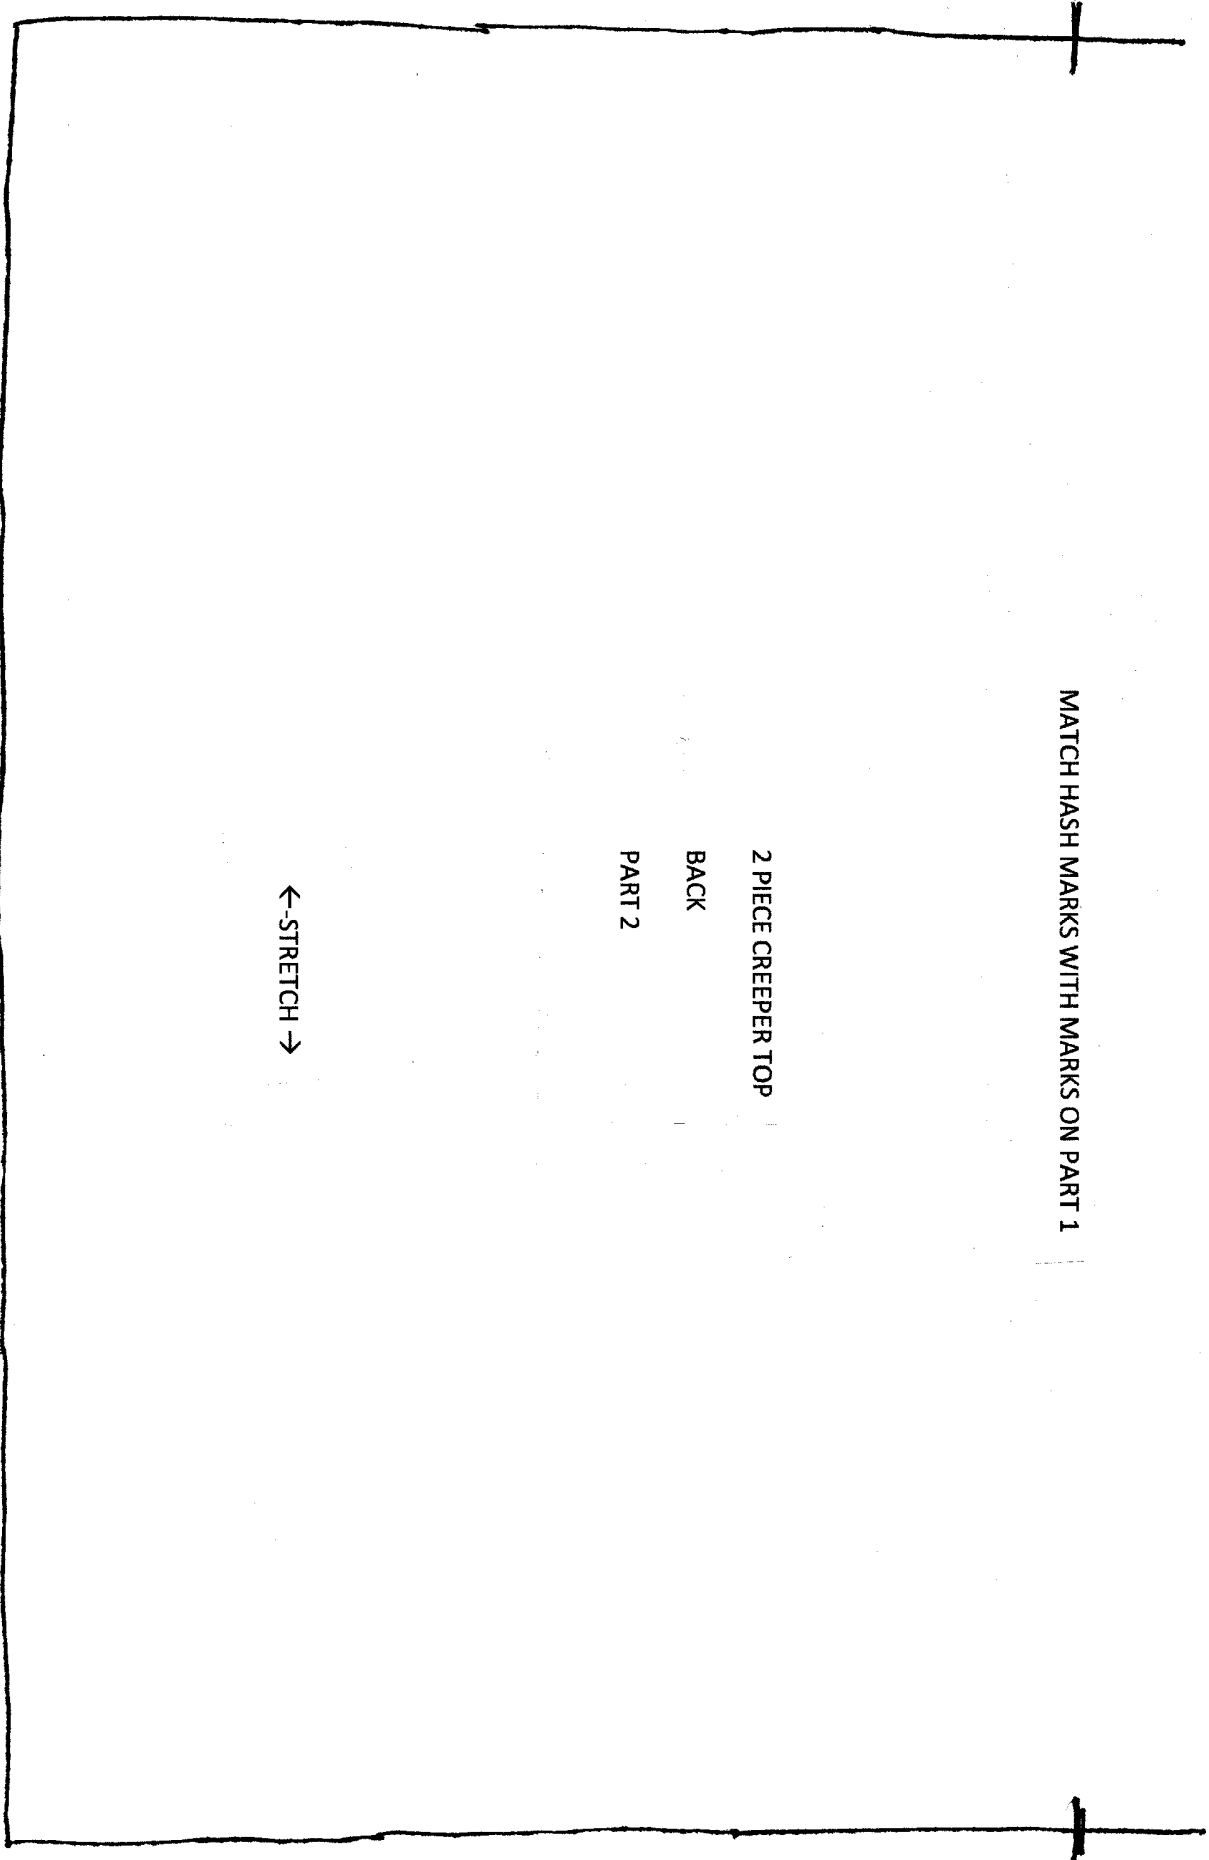

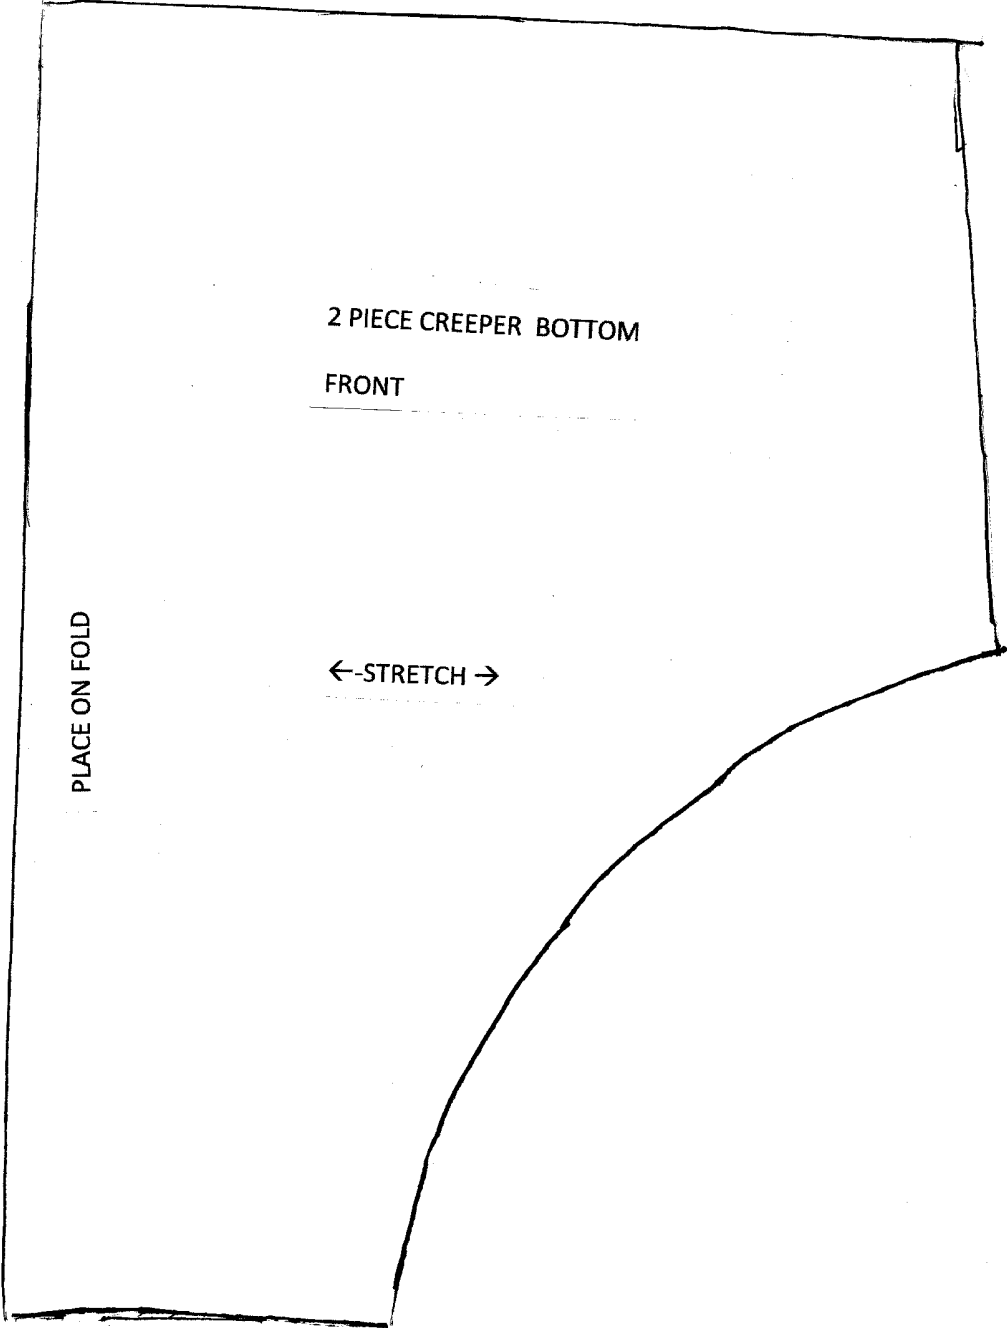


2 PIECE CREEPER BOTTOM

FRONT

PLACE ON FOLD

←-STRETCH →

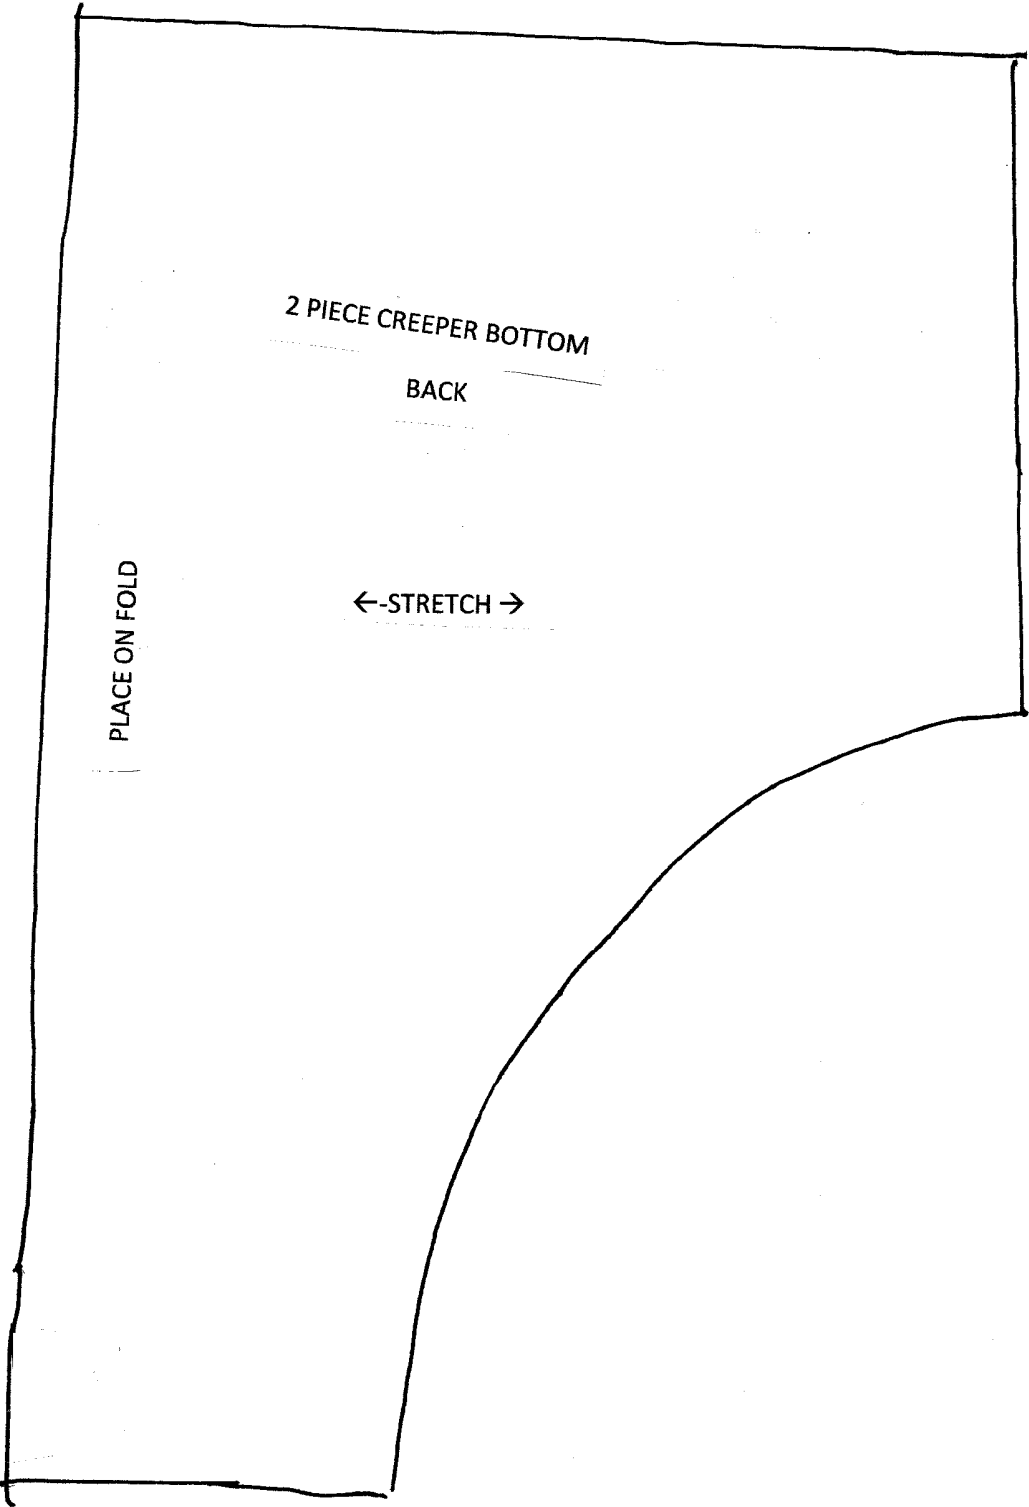

2 PIECE CREEPER BOTTOM

BACK

PLACE ON FOLD

←-STRETCH→