

LAP FRONT SHIRT DIRECTIONS
Updated July 2008

Cotton Knit Fabric (no polyester or jersey)

Sewn entirely on serger.

Join shoulder seams.

Serge edges of fronts and neck beginning at the upper side seam edge and ending at the opposite upper side seam edge. (See illustration below)

Serge hem edges of sleeves.


Attach sleeves matching center of top cap of sleeve with shoulder seam. Put sleeve piece on bottom and body piece on top. This eases the sleeve in perfectly.


Lap fronts matching side front seams with back side seams, wrong side out. Serge one side seam .

Serge bottom edge. You will be serging two layers of fabric on front and one on back.

Serge remaining side seam.

Secure tails by threading through loops for at least 1 inch or use the method of serging over the tail.

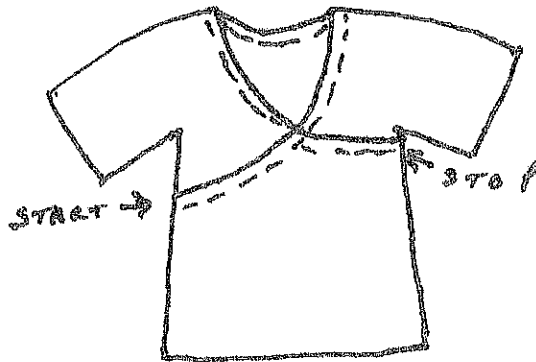

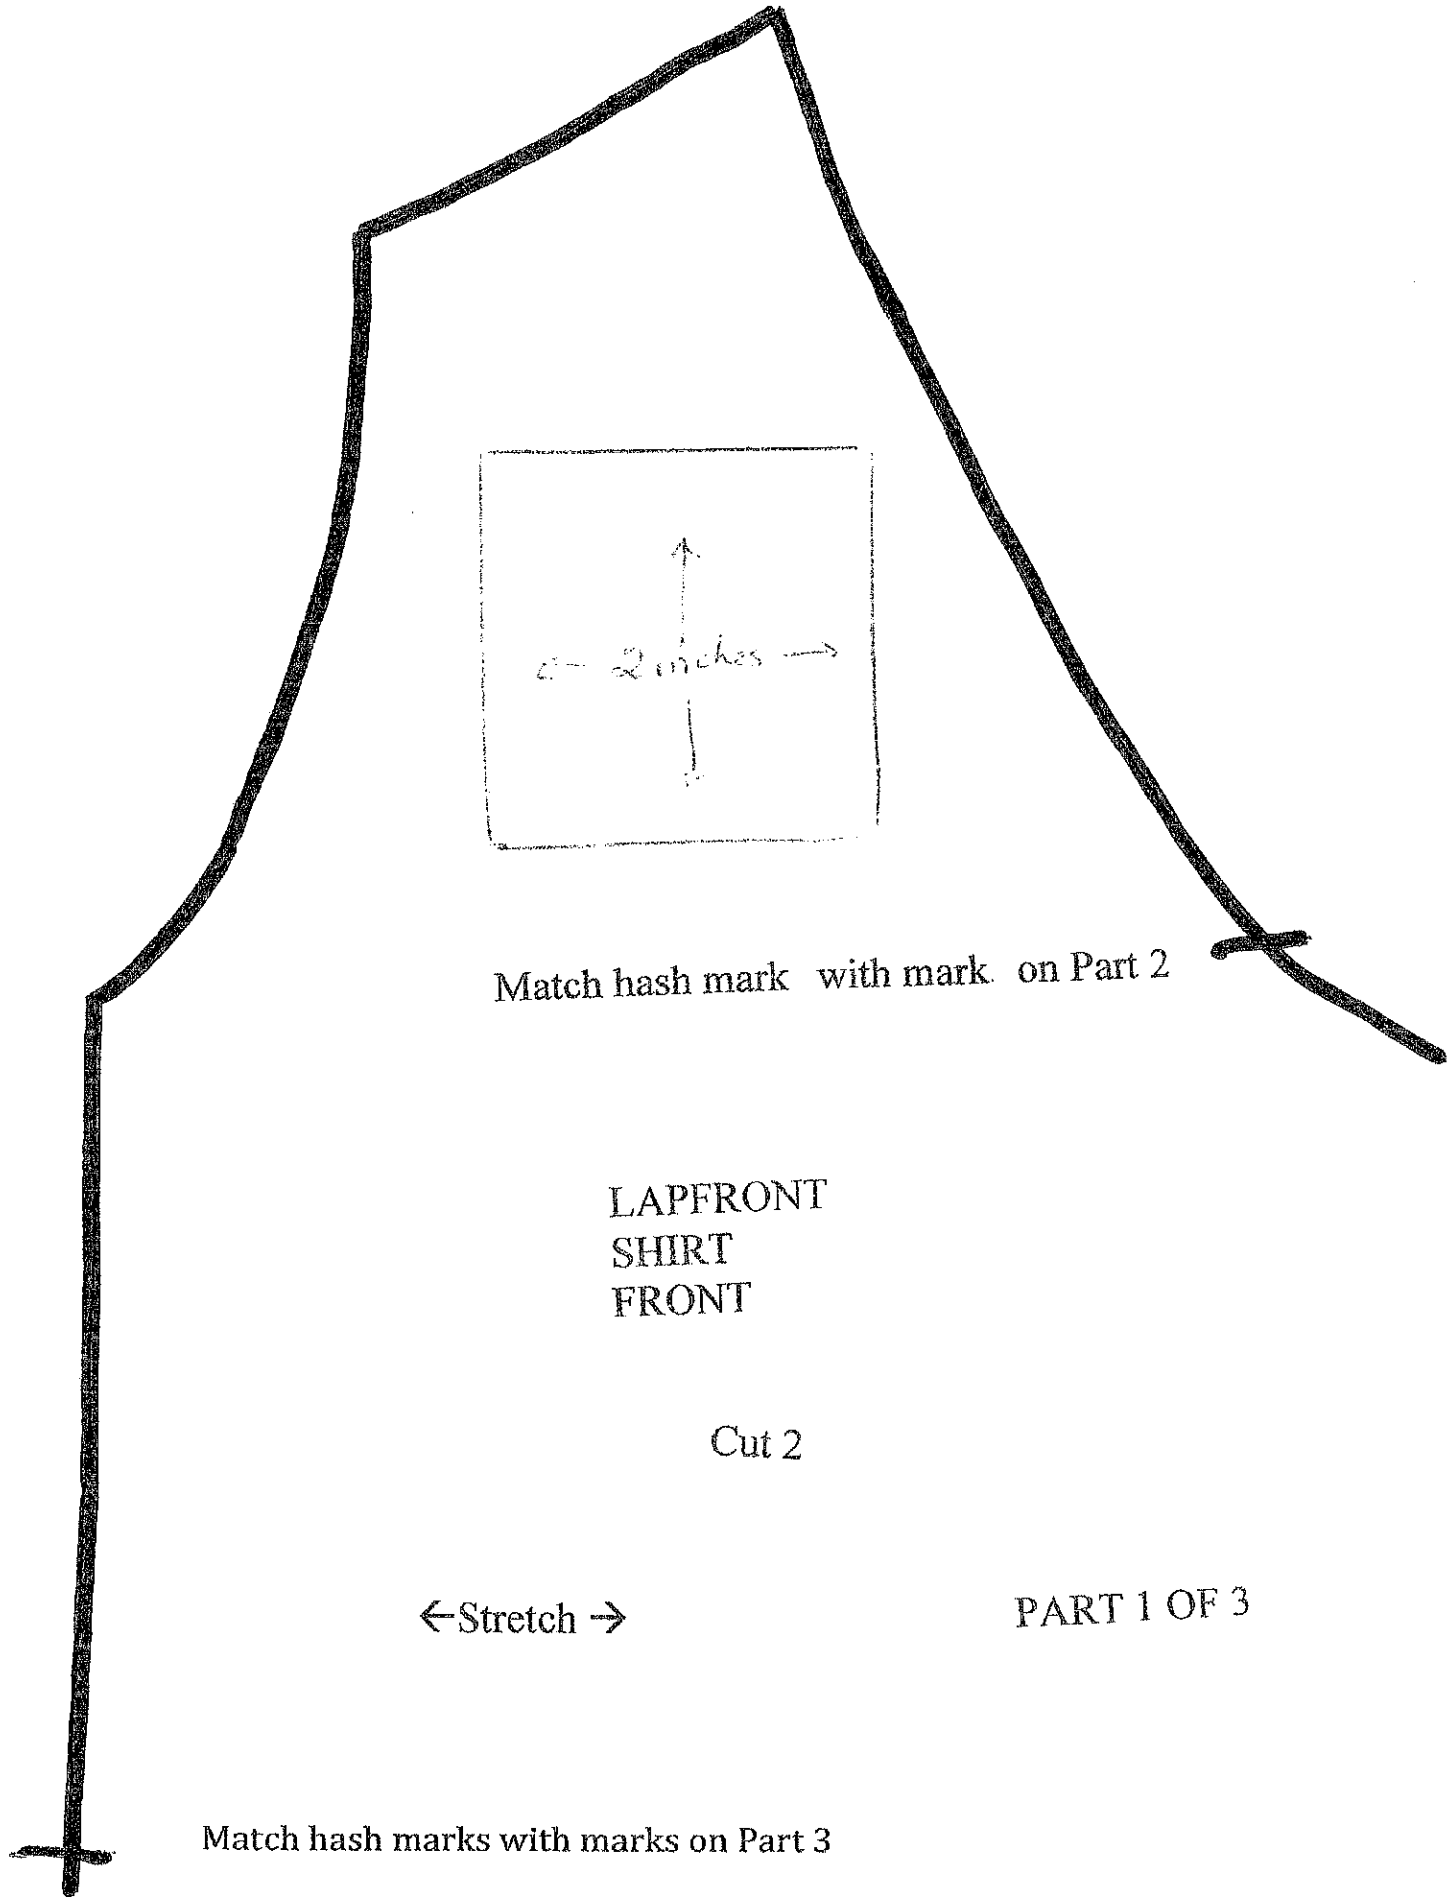

Match hash mark with mark. on Part 2

LAPFRONT
SHIRT
FRONT

Cut 2

←Stretch →

PART 1 OF 3

Match hash marks with marks on Part 3

Match hash mark with mark on Part 1

LAPFRONT
SHIRT
FRONT

PART 2 OF 3

Match hash mark with mark on Part 3





Match hash mark with mark on Part 1

PART 3 OF 3

LAPFRONT
SHIRT
FRONT

Match hash mark with mark on Part 2



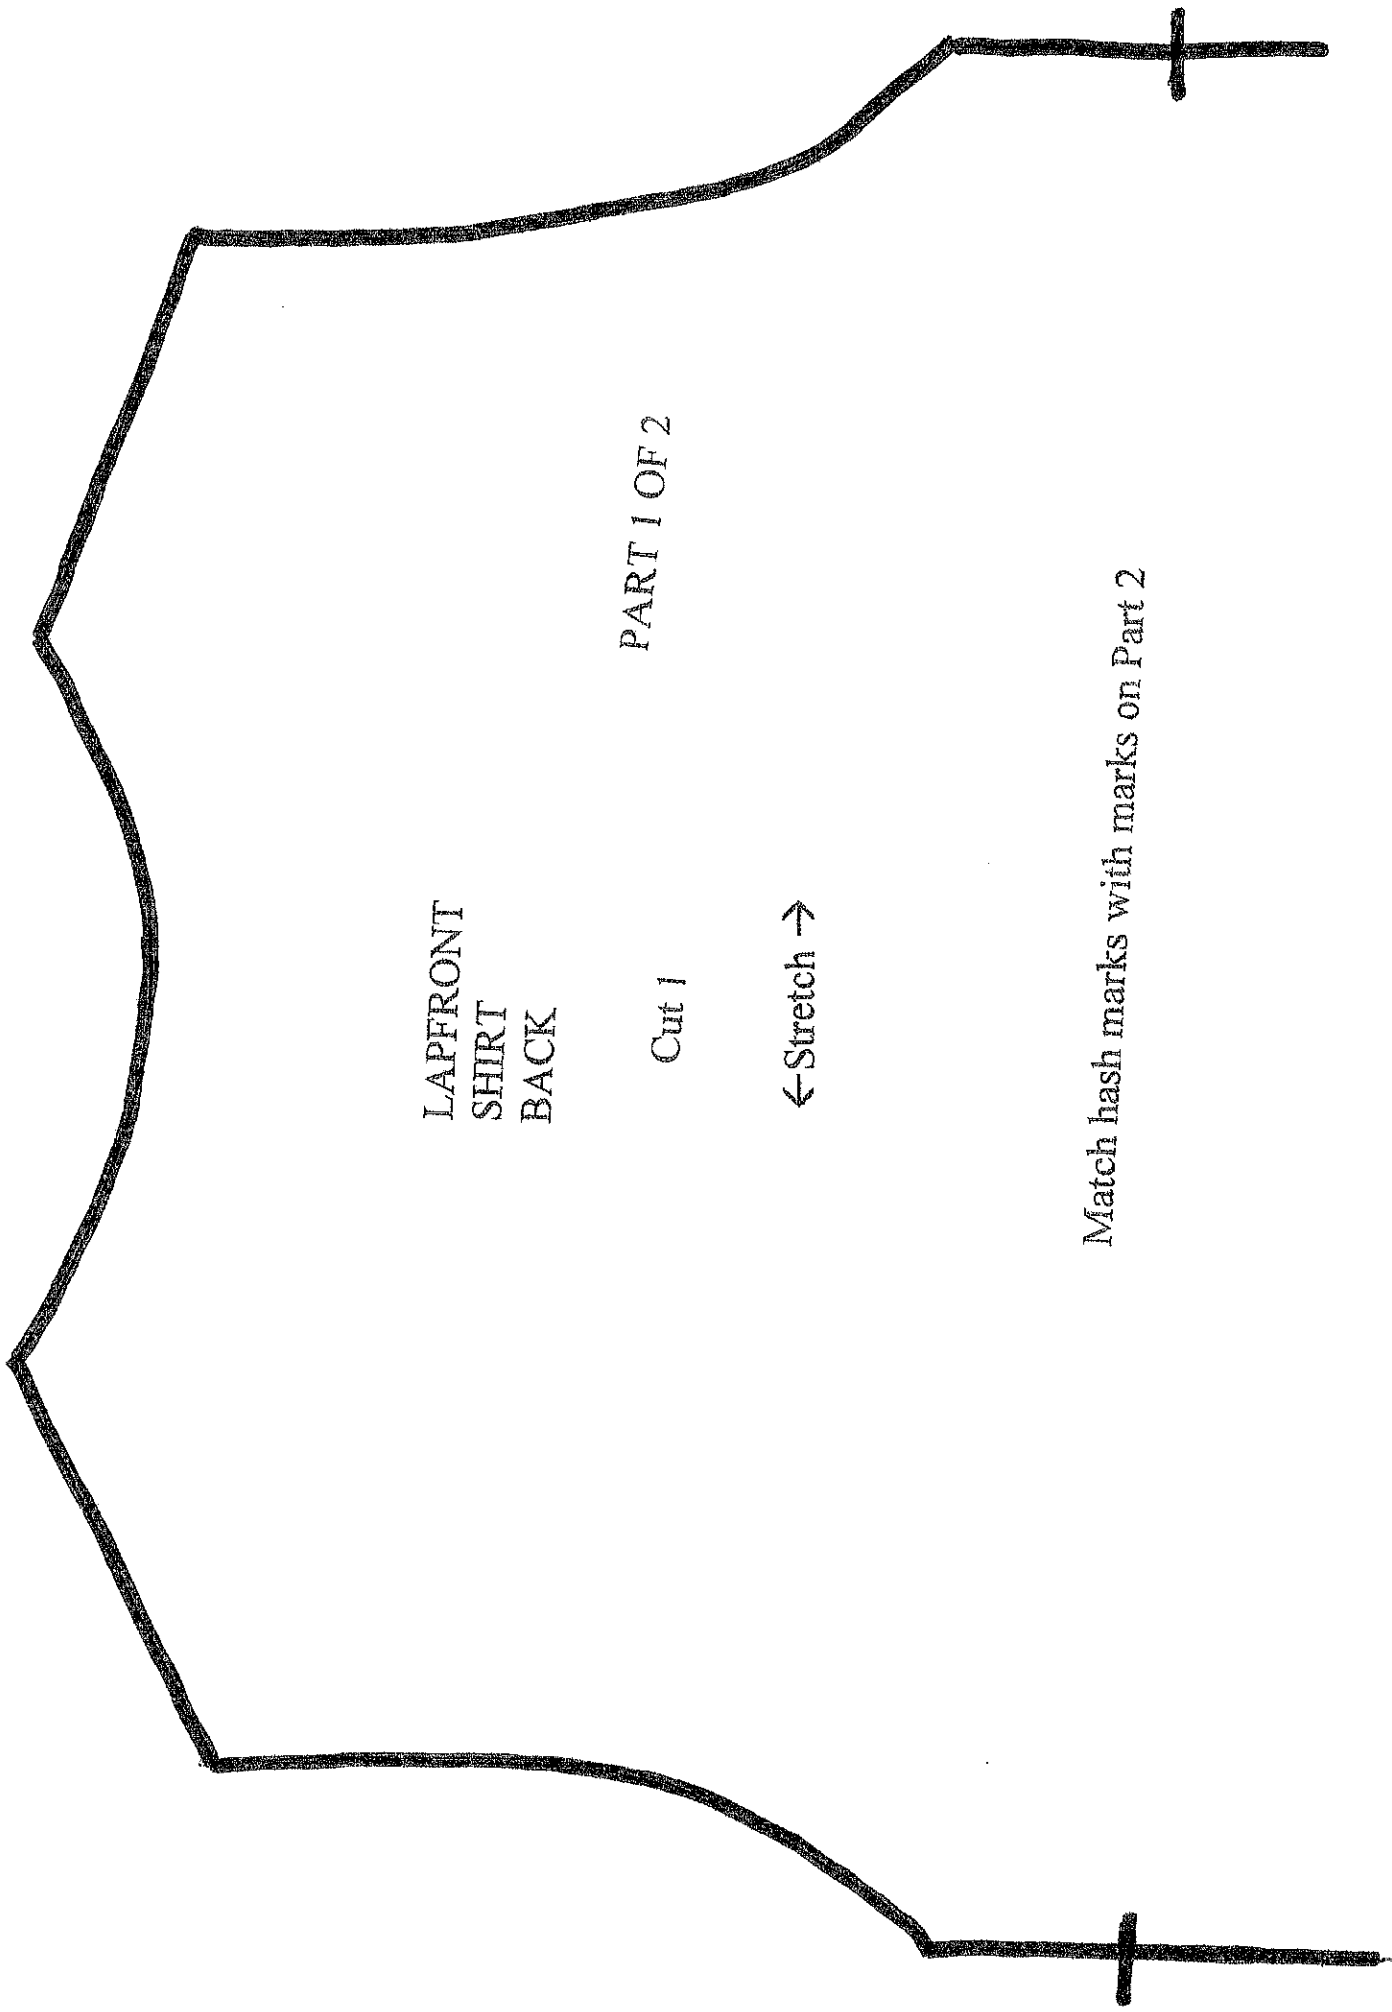

LAPFRONT
SHIRT
BACK

PART 1 OF 2

Cut 1


← Stretch →

Match hash marks with marks on Part 2

Match hash marks with marks on Part 1

LAPFRONT
SHIRT
BACK

PART 2 OF 2

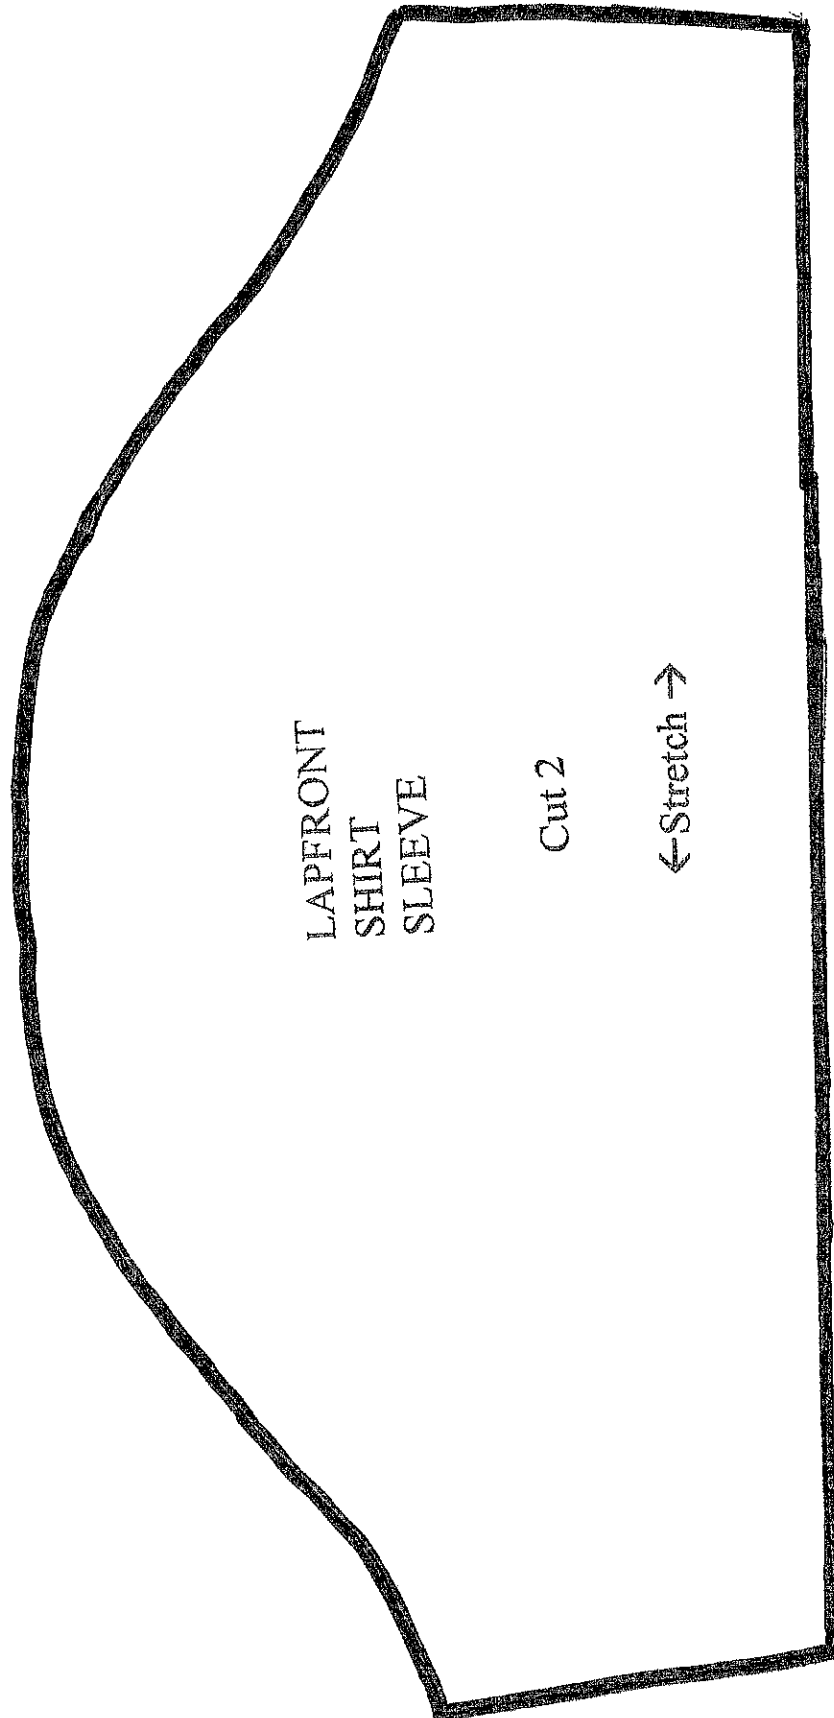

LAPFRONT
SHIRT
SLEEVE

Cut 2

← Stretch →