


## Residential Dumbwaiter

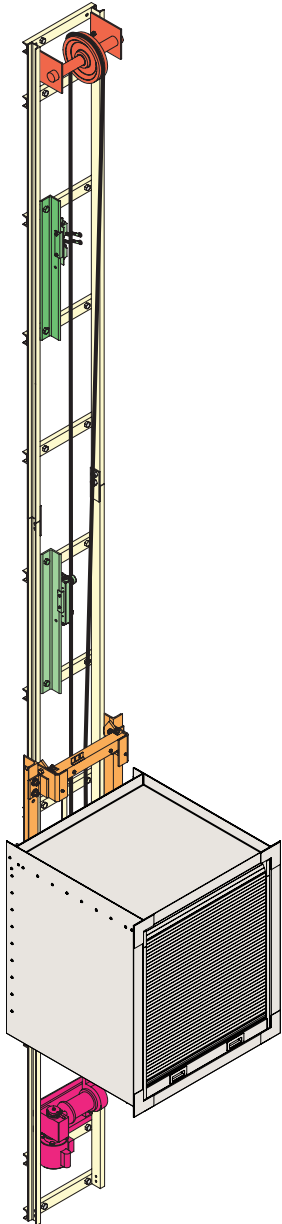

**Capacity** - 200 lbs.

**Travel** - Up to 50 ft.

**Stops** - Up to 6 stops

**Nominal Speed** - 50 feet per minute

**Overhead** - 1'6" minimum,  
2' recommended above top of car  
(additional overhead required for car gates  
or overhead machine configurations)

**Loading Height** - 36" minimum when  
machine is "rail mounted" below car  
(overhead or remote machine location  
and/or pit, required for loading heights  
below 36")

**Guide Rails** - Heavy gauge steel channel

**Electric Supply** - 230 volts, 10 amp,  
single phase

**Powerhead** - Single speed winding drum  
with 1HP motor

**Brake** - Electrically released, spring applied

**Controls** - Momentary contact call/send  
push buttons at each landing

**Safeties** - Twin instantaneous broken  
cable, applied by a retained compression  
spring


**Cable** - 3/16" diameter steel cable

**Hoistway Door Interlocks** - Required at  
each landing


**Emergency Lowering** - Manual hand  
crank

**Car** - Powdercoated steel (standard)  
Stainless Steel (optional)

### Car Gate Options



Roll Top (standard)



Bi-Parting (optional)

**Additional Options** - are available, for  
details contact your local dealer

Products and illustrations shown may not be standard. Specifications describe equipment, which is either standard or optional. Stated ratings are based on standard equipment. Specifications and design are subject to change without notice.