


DRIVE-OVER CHAIN CONVEYOR




Complimented by Comparison

DRIVE-OVER CHAIN CONVEYOR

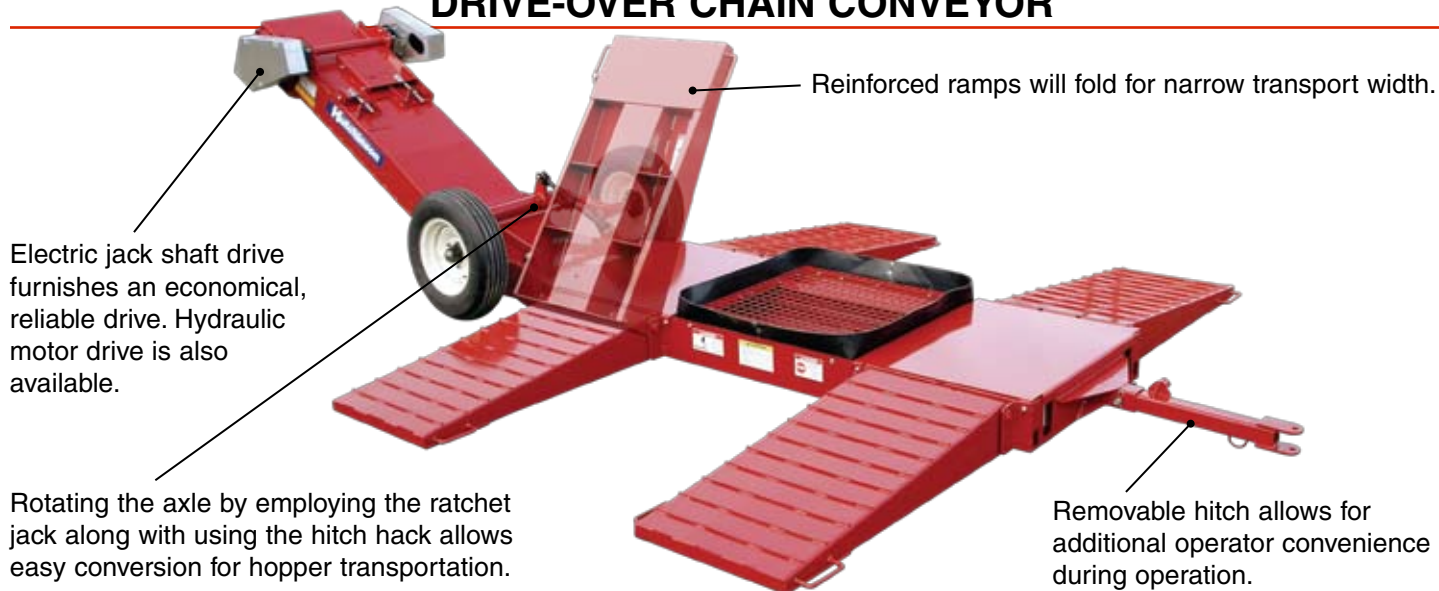


DRIVE-OVER CHAIN CONVEYOR OPERATING HEIGHTS AND GENERAL DIMENSIONS

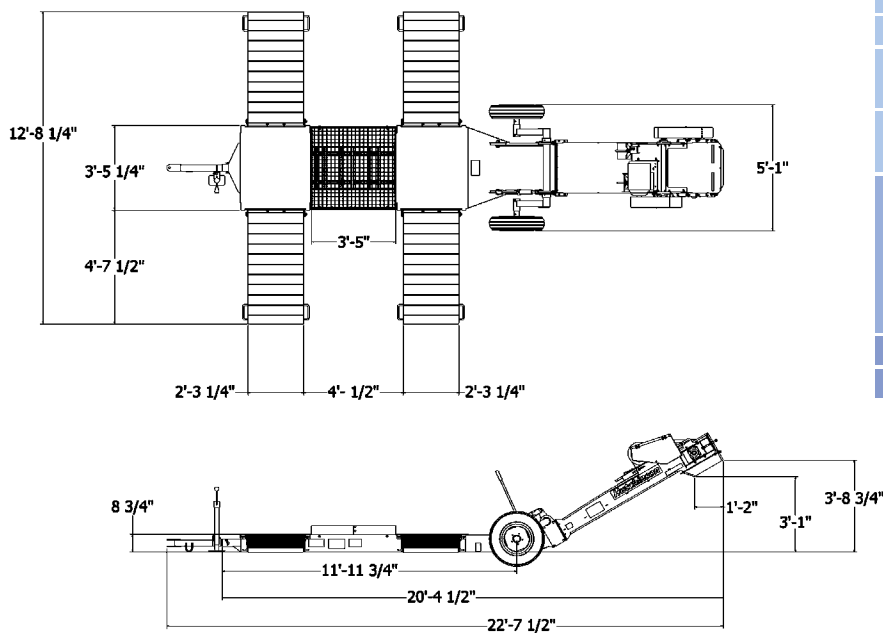

DRIVE-OVER CHAIN CONVEYOR SPECIFICATIONS

Capacity	Up to 8,000 BPH (216 TPH)
Head Shaft Speed	310 RPM
Chain Speed	385 FPM
Paddles	3/8" thick UHMW w/metal reinforcement plate
Drive	Electric Hydraulic (w/flow control valve)
Horsepower Req'd	10 HP (7.5 kw) elec. motor Hydraulic drive capacity minimum: 22 gal./min. (83 l/min) @ 2000 PSI (13,790 kPa)
Hopper	Flexible Rubber Belting Hopper
Wheels	15" 5-Bolt

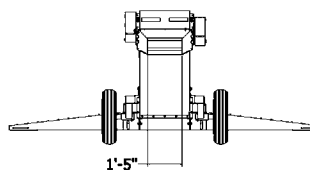

Electric Drive Model Shown

Call Toll-Free

1-800-523-6993

For more information.



A Division of **GLOBAL** Industries, Inc.
P.O. Box 629 • Clay Center, KS 67432
Ph. (785) 632-2161 • FAX (785) 632-5964
www.hutchinson-mayrath.com

Distributed by: