

KT, KV, KM, KR
Series

Commercial
Deadbolt



KT, KV, KM, KR SERIES

COMMERCIAL GRADE DEADBOLTS

SPECIFICATIONS – KT Series (Extra Heavy Duty Commercial Grade)

FOR DOORS:	1-3/8" to 1-3/4".
BACKSET:	2-3/4" and 2-3/8".
BORE:	Side of door: 1-7/8" recommended, or 2-1/8" diameter. Edge of door: 1" diameter.
FACEPLATE:	2-3/4" Backset: 2-1/4" x 1-1/8". 2-3/8" Backset: 2-1/4" x 1".
STRIKE:	2-3/4" x 1-1/8". Brass or stainless steel.
DEADBOLT:	1" throw with two concealed 1/4" diameter case-hardened steel roller pins.
TRIM:	Solid stainless steel or brass scalp with reinforced diecast inner 2-1/2" diameter. Free-turning.
KEYS:	Two per lock.
KEYWAYS:	SCC Standard/Also available in keyways of other manufacturers.
INTERCHANGEABLE CORE:	6 pin 1-1/4" or 7 pin 1-3/8" Compatible with Best, Falcon and Arrow Available in 1-3/4" doors only. Double cylinder functions are available in 6 pin only.
CYLINDER:	Brass mortise 1-1/8" cylinder. 6-pin cylinder keyed to 5 pins.
KEYING:	Can be MK, CMK, GMK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA).
FINISHES:	US3(605), US10(612), US10B(613), US32(629), US32D(630).
WARRANTY:	One-year limited warranty.



SPECIFICATIONS – KV Series (Standard Duty Commercial Grade)

FOR DOORS:	1-3/8" to 1-3/4".
BACKSET:	Adjustable 2-3/8" to 2-3/4".
BORE:	Side of door: 2-1/8" diameter, except KV125 1-3/4" only
FACEPLATE:	1" with square corners.
STRIKE:	2-3/4" x 1-1/8". Brass, stainless steel.
DEADBOLT:	1" throw with case-hardened roller pin. Brass.
TRIM:	Stainless steel, wrought brass.
KEYS:	Two per lock.
KEYWAYS:	SCC Standard/Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	6 pin 1-1/4" or 7 pin 1-3/8" Compatible with Best, Falcon and Arrow Available in 1-3/4" doors only.
CYLINDER:	Brass 6-pin cylinder keyed to 5 pins.
KEYING:	Can be MK, CMK, GMK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA).
FINISHES:	US3(605), US4 (606), US10B (613), US26D (626) or US32D (630).
CERTIFICATIONS:	UL10C/UBC 7-2 (1997) Positive Pressure Rated UL10B Neutral Pressure Rated.
WARRANTY:	One-year limited warranty.



SPECIFICATIONS – KM Series (Heavy Duty Commercial Grade)



FOR DOORS:	1-3/8" to 1-3/4".
BACKSET:	2-3/4" Standard (UL). Optional 2-3/4" – 2-3/8" adjustable with 2-1/4" x 1" faceplate available (not U.L. Listed).
BORE:	Side of door: 2-1/8" diameter.
FACEPLATE:	2-3/4" backset: 2-1/4" x 1-1/8". Adjustable backset: 2-1/4" x 1"
STRIKE:	2-3/4" x 1-1/8". Brass or stainless steel.
DEADBOLT:	1" throw with case-hardened roller pin. Brass.
TRIM:	Stainless steel or wrought brass.
KEYS:	Two (2) per lock.
KEYWAYS:	SCC Standard/Also available in 1-1/4" keyways of other manufacturers.
INTERCHANGEABLE CORE:	6 pin 1-1/4" or 7 pin 1-3/8" Compatible with Best, Falcon and Arrow Available in 1-3/4" doors only.
CYLINDER:	Brass 6-pin cylinder keyed to 5 pins.
KEYING:	Can be MK, CMK, GMK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA).
FINISHES:	US3(605), US4 (606), US10B (613), US26D (626) or US32D (630).
CERTIFICATION:	U.L., U.L.C. Listed, UL10C/UBC 7-2 (1997) Positive Pressure Rated UL10B Neutral Pressure Rated.
WARRANTY:	One-year limited warranty.

SPECIFICATIONS – KR Series (Ultra-Light Duty Commercial Grade)


FOR DOORS:	1-3/8" to 1-3/4".
BACKSET:	Adjustable 2-3/8" to 2-3/4".
BORE:	Side of door: 2-1/8" diameter.
FACEPLATE:	1" with square corners.
STRIKE:	2-3/4" x 1-1/8". Brass or stainless steel.
DEADBOLT:	1" throw with case-hardened roller pin. Brass.
TRIM:	Stainless steel or wrought brass.
KEYS:	Two per lock.
KEYWAY:	SCC.
CYLINDER:	5 pin only.
FINISHES:	US3(605), US32D(630).
WARRANTY:	One-year limited warranty.



KT, KV, KM, AND KR SERIES DEADBOLTS — FUNCTION CHART

FUNCTION	FUNCTION NO.	INSIDE	OUTSIDE	FUNCTION DESCRIPTION
Single Cylinder	116			<ul style="list-style-type: none"> • Lock or unlock by key from outside, by thumb turn from inside
Double Cylinder	137			<ul style="list-style-type: none"> • Lock or unlock by key from both sides
Single Sided	KV 125			<ul style="list-style-type: none"> • KV only • Deadbolt by inside thumb turn only • Special door preparation required
Single Sided	KT 125			<ul style="list-style-type: none"> • KT only • Deadbolt by inside thumb turn only • Special door preparation required
Single Sided	125 BK			<ul style="list-style-type: none"> • KV only • Deadbolt by inside thumb turn only
Classroom	148			<ul style="list-style-type: none"> • KT only • Lock or unlock by key from outside • Turnpiece inside retracts deadbolt, but will not project it
Entrance	121			<ul style="list-style-type: none"> • KT only • Lock or unlock by key from outside • Blank mortise cylinder on inside

See price list for function availability within series

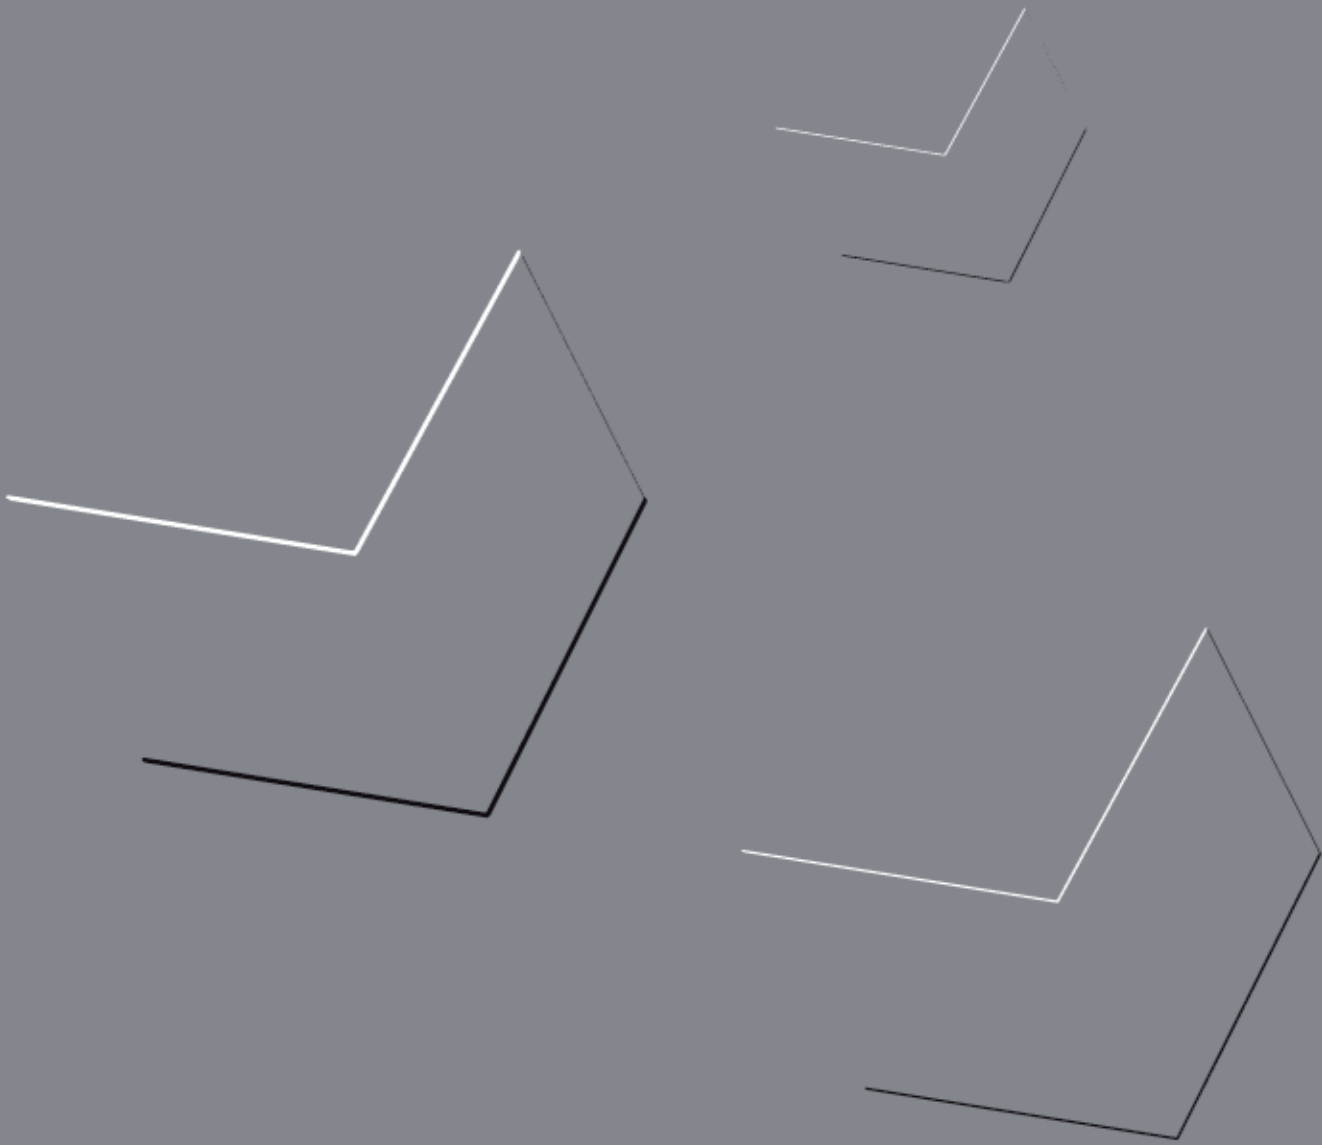

PO Box 507 2754 Creek Hill Road Leola PA 17540

800 441 9692

717 656 4281

717 656 6892 Fax

www.pdqlocks.com